



# Stud Welding Systems Catalogue



What a wonderful Welding System



Stud Welding Products  
(HBS Distributor)

800-252-1919

[www.StudWeldProd.com](http://www.StudWeldProd.com)

[sales@StudWeldProd.com](mailto:sales@StudWeldProd.com)



Stud Welding Systems Catalogue

Transmission and duplication of this document, dissemination and notification of the contents are not permitted unless expressly approved.

Pictorial representations may differ from the original.

All rights, errors and technical amendments reserved.

© HBS Welding Systems GmbH



**red**dot award  
winner

Presented with the Red Dot Design Award, one of the most prestigious design competitions, which is considered to be the yardstick for the highest design quality at international level. This seal of quality confirms the innovative design excellence of HBS.





HBS –





World



## Table of Contents

|                           |   |
|---------------------------|---|
| Quality alive             | 8 |
| Stud Welding - Advantages | 9 |

## Manual Systems

|          |                                                             |           |
|----------|-------------------------------------------------------------|-----------|
| <b>1</b> | <b>CD - Capacitor Discharge</b>                             | <b>10</b> |
| 1.1.     | Applications                                                | 10        |
| 1.2.     | Configuration CD                                            | 14        |
| 1.3.     | Battery powered                                             |           |
|          | <b>Pegasar 500 accu, Pegasar 500 accu Insulation</b>        | <b>16</b> |
| 1.4.     | CDi Series power sources                                    |           |
|          | <b>CDi 1502, CDi 2302, CDi 3102</b>                         | <b>18</b> |
| 1.5.     | Stud welding guns                                           |           |
|          | <b>C 06-3, C 08, CA 08, CI 03</b>                           | <b>19</b> |
| 1.6.     | Overview CD power sources / sets                            | 20        |
| 1.7.     | Mounting heat cost allocators                               |           |
|          | <b>ACCU-TWIN</b>                                            | <b>22</b> |
| <b>2</b> | <b>ARC/SC - Drawn ARC and Short Cycle</b>                   | <b>24</b> |
| 2.1.     | Applications - Drawn ARC                                    | 24        |
| 2.2.     | Applications - Short Cycle                                  | 26        |
| 2.3.     | Inverter technology                                         | 28        |
| 2.4.     | Configuration ceramic ferrule - up to M16 / 5/8" (type RD)  | 30        |
| 2.5.     | Configuration ceramic ferrule - up to M24 (dia. 25 mm) / 1" | 32        |
| 2.6.     | Configuration shielding gas                                 | 34        |
| 2.7.     | Configuration short cycle                                   | 36        |
| 2.8.     | Inverter Series power sources                               |           |
|          | <b>Visar 650</b>                                            | <b>38</b> |
|          | <b>IT 1002, IT 2002, IT 90</b>                              | <b>39</b> |
| 2.9.     | Transformer Series power sources                            |           |
|          | <b>ARC 800</b>                                              | <b>40</b> |
| 2.10.    | Overview ceramic application (RD, MD, PD, UD, ID)           | 42        |
| 2.11.    | Overview ceramic application (SD)                           | 44        |
| 2.12.    | Stud welding guns                                           |           |
|          | <b>CA 08, A 12, A 12-FL</b>                                 | <b>46</b> |
|          | <b>A 16, A 22</b>                                           | <b>48</b> |
| 2.13.    | Overview ARC/Inverter power sources / sets                  | 50        |

|          |                                     |           |
|----------|-------------------------------------|-----------|
| <b>3</b> | <b>MARC - Magnetic rotating ARC</b> | <b>52</b> |
| 3.1.     | Applications                        | 52        |
| 3.2.     | Nut welding systems                 |           |
|          | <b>MARC 1 A</b>                     | <b>54</b> |
| 3.3.     | Sleeve welding systems              |           |
|          | <b>PC-M3</b>                        | <b>55</b> |

## Automatic Systems

|          |                                         |           |
|----------|-----------------------------------------|-----------|
| <b>4</b> | <b>Automatic - Components</b>           | <b>58</b> |
| 4.1.     | Configuration - Semi-automatic gun      | 58        |
| 4.2.     | Configuration CD - Components           | 60        |
| 4.3.     | Configuration SC - Components           | 62        |
| 4.4.     | Fully automatic stud feeder             |           |
|          | <b>VBZ-3</b>                            | <b>64</b> |
| 4.5.     | Semi-automatic welding gun              |           |
|          | <b>PAH-1</b>                            | <b>65</b> |
| 4.6.     | Welding heads                           |           |
|          | <b>KAH 412, KAH 412 LA</b>              | <b>66</b> |
| 4.7.     | Overview automatic power sources / sets | 68        |
| 4.8.     | Automatic power sources                 |           |
|          | <b>CDi 1502, CDMi 2402, CDMi 3202</b>   | <b>69</b> |
|          | <b>ARC 800</b>                          | <b>70</b> |
|          | <b>IT 1002, IT 90</b>                   | <b>71</b> |
| 4.9.     | Unit for production lines               |           |
|          | <b>IPC 90</b>                           | <b>72</b> |

|          |                                                    |           |
|----------|----------------------------------------------------|-----------|
| <b>5</b> | <b>Automatic - Automatic stud welding machines</b> | <b>73</b> |
| 5.1.     | <b>CPW Series</b>                                  | <b>73</b> |
| 5.2.     | <b>MPW Series</b>                                  | <b>74</b> |

|          |                                 |           |
|----------|---------------------------------|-----------|
| <b>6</b> | <b>Automation - Accessories</b> | <b>76</b> |
|----------|---------------------------------|-----------|

## Welding elements / Accessories

|  |                 |           |
|--|-----------------|-----------|
|  | <b>Overview</b> | <b>78</b> |
|--|-----------------|-----------|




## Quality Management System according to ISO 9001:2008

- Certified since 1994
- Implementation of our  
Company Policy and  
Corporate Mission
- Guaranteed high quality of  
our products and services
- Well-defined and clearly  
structured processes
- Continuous improvement of  
our:
  - management processes
  - business processes
  - supporting processes

## Stud Welding – Advantages

**Saves time. Saves money. Unchallenged.**

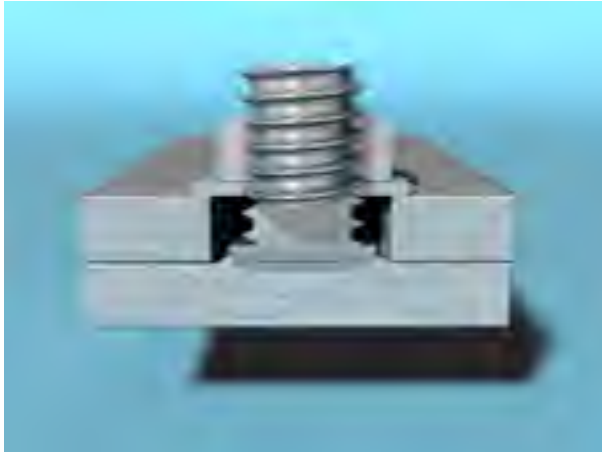

**No reworking!**

In many areas stud welding is the most economic fastening method for components. If using thin sheet metal, stud welding is often the only technical solution.

Tremendous time and cost savings

**No:** drilling - punching - threading - gluing - riveting - screwing



### **New design potential**

- Very low distortion by extremely short welding time
- No leaking caused by drilled holes
- High strength
- One-sided accessibility of the component is sufficient
- Weldable even onto very thin plates
- Joining of different materials is possible

### **Unsurpassed economy**

- Can be automated to a very high degree
- Very short welding time (1 ms to 1 500 ms), fast weld rates
- Fast and easy handling, leads to high productivity
- No marks on backside of coated or high alloyed plates
- Low prices for standard studs

# Capacitor discharge stud welding



## CD

### Capacitor Discharge (CD) stud welding with tip ignition

HBS stud welding units provide outstanding reductions in costs and time. Every weld is precise avoiding any need for post treatment.

The recipe for success:

Extremely short welding time! (1 to 3 ms). No additional welding products are needed.

Because of a very low thermal load, the welding zone is minimal. In this way, distortion of the work piece is avoided. Often this is the only applicable technical solution.


#### Contact or gap

In contrast to contact welding, with gap welding the stud is positioned at a defined distance shortly before welding starts. This creates a higher plunging speed which leads to a shorter welding time (only 1 ms!).

This characteristic also allows welding of difficult materials like e.g. aluminium and brass.



Joining of stud-type welding elements with a diameter M3 to M10 (dia. 2 to 10 mm) onto thin sheets, min. 0.5 mm. Mild steel, stainless steel, aluminium and brass.

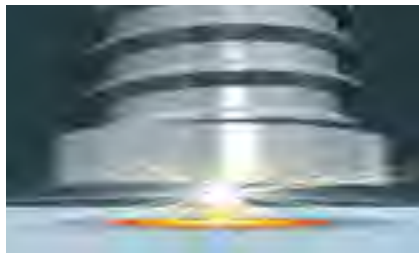

An arc is ignited between the face of stud and the surface of a work piece.



Both parts are melted, the stud is gently pressed against the work piece and then joined together.



The molten areas solidify. The extremely short and clean welding process does not require any machining.



As a result, an even and complete joint is achieved with a strength which is above the strength of stud and base material. The low thermal load provides welding onto thin sheets without damage to the rear side.

**Keep it simple. Save time and money.**  
**Unmatched economic efficiency with HBS.**



# Capacitor discharge stud welding

1

Systems for **manual** applications - **CD**



**CD**

**Best Solution  
Best Results**

Typical applications include:  
Sheet metalwork, electronic industries, switchboard cabinets, laboratory and medical equipment, food industry, household appliances, etc.

When studs are welded to thin sheets (steel, aluminium and brass), the procedure of tip ignition will always be the most cost effective process and sometimes the only solution.



# Capacitor discharge stud welding



## CD

**Cutting edge technology is combined with time proven stud welding units**

### **The professional generation**

The HBS R&D department unceasingly reviews components for new, improved, cost effective and efficient technology to keep all HBS products at the cutting edge.



All the available experience and knowledge in the stud welding industry are part of HBS products which we have been developing for over 40 years. HBS welding elements are a part of this technology.





Studs to fasten trowel handle

## Cutting edge technology

### **C 06-3**

Simple – no setting required for lift and spring pressure. Stud welding gun specially paired with power source for outstanding results.

### **CA 08**

High-performance stud welding gun for tip ignition process of gap welding. High accuracy by zero-play ball linear bearing for guiding the welding piston.

### **C 08**

Rugged casing with ergonomic grip. All-rounder also used for welding aluminium studs to M4 (#8).

### **CI 03**

For welding cupped head pins. Fixing HVAC insulation matting (heating, ventilation and air-conditioning).



# Configuration

## Capacitor discharge stud welding



| Material                                                                                        | Diameter  | Catalogue        |
|-------------------------------------------------------------------------------------------------|-----------|------------------|
|                                                                                                 | M3 to M10 | Welding elements |
| <b>Type PT</b>                                                                                  |           |                  |
|  Threaded stud |           |                  |

| Material                                                                                                       | Diameter | Catalogue        |
|----------------------------------------------------------------------------------------------------------------|----------|------------------|
|                                                                                                                | M4 to M8 | Welding elements |
| <b>Type PT</b>                                                                                                 |          |                  |
|  Paint clearing threaded stud |          |                  |


| Material                                                                                          | Diameter | Catalogue        |
|---------------------------------------------------------------------------------------------------|----------|------------------|
|                                                                                                   | 5 mm     | Welding elements |
| <b>Type PT</b>                                                                                    |          |                  |
|  Fir tree stud |          |                  |

| Material                                                                                                  | Diameter    | Catalogue        |
|-----------------------------------------------------------------------------------------------------------|-------------|------------------|
|                                                                                                           | 3 to 7.1 mm | Welding elements |
| <b>Type UT</b>                                                                                            |             |                  |
|  Unthreaded stud (pin) |             |                  |

| Material                                                                                                            | Diameter                      | Catalogue        |
|---------------------------------------------------------------------------------------------------------------------|-------------------------------|------------------|
|                                                                                                                     | M3/dia. 5 mm - M5/dia. 7.1 mm | Welding elements |
| <b>Type IT</b>                                                                                                      |                               |                  |
|  Stud (pin) with internal thread |                               |                  |

| Material                                                                            | Diameter | Catalogue        |
|-------------------------------------------------------------------------------------|----------|------------------|
|                                                                                     | 6.3 mm   | Welding elements |
| <b>Type Ground clips</b>                                                            |          |                  |
|  |          |                  |

| Material                                                                                                                                                                                                                                                                                          | Welding range          | Page |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|------|
|                                                                                                                                                                                                                                                                                                   | M3 to M6<br>#4 to 1/4" | 16   |
|  <b>Pegasar 500 accu</b><br>Mobile, light and robust <b>battery powered</b> for construction sites and workshops (IP 44). Intuitive, simple to operate thanks to quick-access buttons and pre-stored parameters. |                        |      |

| Ground cable                                                                        |
|-------------------------------------------------------------------------------------|
| 92-40-154                                                                           |
|  |

| Material                                                                                                                                                                                | Welding range           | Page |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|------|
|                                                                                                                                                                                         | M3 to M8<br>#4 to 5/16" | 18   |
|  <b>CDi 1502</b><br>For construction sites and workshops (IP 23). Welds to M8 (5/16") on thin sheet. |                         |      |

| Material                                                                                                                                                                                             | Welding range                         | Page |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|------|
|                                                                                                                                                                                                      | M3 to M8 (M10)<br>#4 to 5/16" (7/16") | 18   |
|  <b>CDi 2302</b><br>Allrounder für Baustelle und Werkstatt (IP 23). Für Bolzen bis M10 (7/16") auf dünnen Blechen |                                       |      |

| Ground cable                                                                          |
|---------------------------------------------------------------------------------------|
| 92-40-095                                                                             |
|  |

| Material                                                                                                                                                                                                     | Welding range            | Page |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|------|
|                                                                                                                                                                                                              | M3 to M10<br>#4 to 7/16" | 18   |
|  <b>CDi 3102</b><br>Allrounder für construction sites and workshops (IP 23). Welds limited to M10 (7/16") on thin sheets. |                          |      |

| Material                                                                                                                                                                                                                                              | Welding range                                                    | Page |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|------|
|    | M3 to M6 (Aluminium up to M4)<br>#4 to 1/4" (Aluminium up to #8) | 19   |



**C 06-3 with foot ring**  
*Universal design for use on flat surfaces.*  
 Easy handling.  
 No setting for lift and spring pressure.  
 Aluminium to M4 (#8).

| Material                                                                                                                                                                                                                                              | Welding range                                                    | Page |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|------|
|    | M3 to M6 (Aluminium up to M4)<br>#4 to 1/4" (Aluminium up to #8) | 19   |



**C 06-3 with centering tube PPR-2**  
*Used for welding with templates and for protection against spatter.*  
 Easy handling. No setting for lift and spring pressure. Aluminium to M4 (#8).

| Material                                                                                                                                                                                                                                                                                                                                | Welding range                 | Page |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|------|
|     | M3 to M8 (M10)<br>#4 to 5/16" | 19   |



**C 08 with foot ring**  
*Universal design for use on flat surfaces.*  
 All-rounder also used for welding galvanised base material. Aluminium to M4 (#8).

| Material                                                                                                                                                                                                                                                                                                                                        | Welding range                 | Page |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|------|
|     | M3 to M8 (M10)<br>#4 to 5/16" | 19   |



**C 08 with centering tube PPR-2**  
*Used for welding with templates and for protection against spatter.*  
 All-rounder also used for welding galvanised base material. Aluminium to M4 (#8).

| Material                                                                                                                                                                                                                                                                                                                                        | Welding range                         | Page |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|------|
|     | M3 to M8 (M10)<br>#4 to 5/16" (7/16") | 19   |



**CA 08 with foot ring**  
*Universal design for use on flat surfaces;*  
 Gap gun used to avoid rear side marking on thin sheets. Aluminium to M6 (1/4").  
 Brass to M4 (#8)

| Material                                                                                                                                                                                                                                                                                                                                        | Welding range                         | Page |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|------|
|     | M3 to M8 (M10)<br>#4 to 5/16" (7/16") | 19   |



**CA 08 with centering tube PPR-2**  
*Used for welding with templates and for protection against spatter;* Gap gun used to avoid rear side marking on thin sheets. Aluminium to M6 (1/4").  
 Brass to M4 (#8).

### Accessories

Page 19



| Legende                                                                               |                        |
|---------------------------------------------------------------------------------------|------------------------|
| Material                                                                              | Stud /Welding material |
|  | Mild steel             |
|  | Stainless steel        |
|  | Aluminium              |
|  | Brass                  |



## Pegasar 500 accu



Battery powered

- Mobile, light and robust battery powered for construction sites and workshops (IP 44)
- Intuitive, simple to operate thanks to quick-access buttons and pre-stored parameters

M3 to M6  
#4 to 1/4"



## Pegasar 500 accu Insulation



Battery powered

- Mobile, light and robust battery powered for construction sites (IP 44)
- Intuitive, simple to operate thanks to quick-access buttons and pre-stored parameters

Cupped head pins: dia. 2 and 2.7 mm  
CD ISO nails: dia. 2 and 3 mm



|                               |                                                                                                  |                                                                                                                                                                 |
|-------------------------------|--------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Welding process               | CD                                                                                               | CD                                                                                                                                                              |
| Welding material              |                                                                                                  |                                                                                                                                                                 |
| Technology                    | Inverter-Capacitor Charging Technology                                                           | Inverter-Capacitor Charging Technology                                                                                                                          |
| Welding range                 | Studs (steel) M3 to M6 / #4 to 1/4"<br>Studs (aluminium) M3 to M4 / #4 to #8                     | Cupped head pins dia. 2 and 2.7 mm<br>CD ISO nails dia. 2 and 3 mm                                                                                              |
| Welding rate                  | M3 / #4 = 40 studs/min. (voltage 55 V),<br>M6 / 1/4" = 20 studs/min. (voltage 95 V)              | Cupped head pin:<br>dia. 2.7 mm = 20 pins/min. (voltage 85 V)<br>CD ISO nail:<br>dia. 3 mm = 20 nails/min. (voltage 90 V)<br>400 welds (cupped head pin 2.7 mm) |
| Count of weldings per battery | 400 welds (M6 / 1/4")                                                                            | 400 welds (cupped head pin 2.7 mm)                                                                                                                              |
| Capacitance                   | 100 000 µF                                                                                       | 100 000 µF                                                                                                                                                      |
| Welding time                  | 1 to 3 ms                                                                                        | 1 to 3 ms                                                                                                                                                       |
| Energy                        | 500 Ws                                                                                           | 500 Ws                                                                                                                                                          |
| Charging voltage              | 50 to 100 V (stepless voltage regulation)                                                        | 50 to 100 V (stepless voltage regulation)                                                                                                                       |
| Power source                  | Capacitor                                                                                        | Capacitor                                                                                                                                                       |
| Battery *)                    | 25.55 V / 5.7 Ah / 145.64 Wh (LiNiCoAlO2)                                                        | 25.55 V / 5.7 Ah / 145.64 Wh (LiNiCoAlO2)                                                                                                                       |
| Battery charging time         | Max. 2.5 h                                                                                       | Max. 2.5 h                                                                                                                                                      |
| Battery life                  | At least 400 charging cycles (at 800 charging cycles still approx. 60 % of the initial capacity) | At least 400 charging cycles (at 800 charging cycles still approx. 60 % of the initial capacity)                                                                |
| Dimension LxWxH               | 475 x 300 x 355 mm / 18.70" x 11.81" x 13.98" (with handle)                                      | 475 x 300 x 355 mm / 18.70" x 11.81" x 13.98" (with handle)                                                                                                     |
| Weight                        | 12.0 kg / 26.46 lbs incl. battery,<br>10.7 kg / 23.59 lbs without battery                        | 12.0 kg / 26.46 lbs incl. battery,<br>10.7 kg / 23.59 lbs without battery                                                                                       |
| Primary power                 | 100 V to 240 V, 50/60 Hz, 10 AT (slow blow);<br>in battery operation: 25.55 V                    | 100 V to 240 V, 50/60 Hz, 10 AT (slow blow);<br>in battery operation: 25.55 V                                                                                   |
| Connected load                | 500 W                                                                                            | 500 W                                                                                                                                                           |
| Cooling type                  | F (temperature controlled cooling fan)                                                           | F (temperature controlled cooling fan)                                                                                                                          |
| IP Code                       | With inserted battery: IP 44, without battery: IP 23                                             | With inserted battery: IP 44, without battery: IP 23                                                                                                            |
| Suitable guns                 | C 06-3                                                                                           | CI 03, C 06-3                                                                                                                                                   |

### Displays

Pegasar 500 accu (metric)



Pegasar 500 accu (imperial)



Pegasar 500 accu Insulation



### Order No.

**92-10-0500** (Plug E+F; Europe + China),  
diameter buttons „metric“ \*)  
**92-12-0500** (Plug B; USA + Canada),  
diameter buttons „imperial“ \*)  
**92-13-0500** (Plug B; Japan),  
diameter buttons „metric“ \*)  
**92-40-154** (Ground cable)

**88-23-484** (Accu 150 - battery; Lithium-Ion-battery)  
**88-23-661** (ACCU CHARGER 150 - charging unit  
for battery type Accu 150 - Plug E+F)  
**88-24-066** (ACCU CHARGER 150 - charging unit  
for battery type Accu 150 - Plug B)  
**88-24-466** (Toolbag)

\*) Battery is not included in delivery.

### Order No.

**92-10-0510** (Plug E+F; Europe + China),  
diameter buttons „metric“ \*)  
**92-12-0510** (Plug B; USA + Canada),  
diameter buttons „imperial“ \*)

**92-40-091** (Ground cable for cupped head pins;  
CI 03)  
**92-40-154** (Ground cable for CD ISO nails; C 06-3)  
**88-23-484** (Accu 150 - battery; Lithium-Ion-battery)  
**88-23-661** (ACCU CHARGER 150 - charging unit  
for battery type Accu 150 - Plug E+F)  
**88-24-066** (ACCU CHARGER 150 - charging unit  
for battery type Accu 150 - Plug B)  
**88-24-466** (Toolbag)

### Legend

Welding process: CD = Capacitor discharge stud welding

Mild steel Stainless steel Aluminium

## Quick battery change



## Toolbag

For Pegasar 500 accu and Visar 650  
Order no. 88-24-466



## Just 2 steps! To the perfect weld

Simply the best – C 06-3

1.

Select  
diameter



2.

Push  
trigger



# CDi series

Systems for capacitor discharge



**Fastest units in its class on the market**

**Multi voltage**

**Globally deployable**

## CDi 1502



- For construction sites and workshops (IP 23)
- Welds to M8 (5/16") on thin sheets

M3 to M8  
#4 to 5/16"

## CDi 2302



- All-rounder for construction sites and workshops (IP 23)
- Welds limited to M10 (7/16") on thin sheets

M3 to M8 (M10)  
#4 to 5/16" (7/16")

## CDi 3102



- Energy package for construction sites and workshops (IP 23)
- For larger studs with energy reserve for coated surfaces

M3 to M10  
#4 to 7/16"

|                                         |                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                 |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Welding process</b>                  | CD                                                                                                                                                                                                                                                                                                                                      | CD                                                                                                                                                                                                                                                                                                                                      | CD                                                                                                                                                                                                                                                                                                                                              |
| <b>Welding material</b>                 |     |     |     |
| <b>Technology</b>                       | Inverter-Capacitor Charging Technology                                                                                                                                                                                                                                                                                                  | Inverter-Capacitor Charging Technology                                                                                                                                                                                                                                                                                                  | Inverter-Capacitor Charging Technology                                                                                                                                                                                                                                                                                                          |
| <b>Display</b>                          | Digital                                                                                                                                                                                                                                                                                                                                 | Digital                                                                                                                                                                                                                                                                                                                                 | Digital                                                                                                                                                                                                                                                                                                                                         |
| <b>Welding range</b>                    | M3 to M8, dia. 2 to 8 mm / #4 to 5/16", dia. 14 ga to 5/16"<br>Cupped head pins: dia. 2 and 2.7 mm / 14 ga and 12 ga<br>Insulation pins: dia. 2 and 3 mm / 14 ga and #4                                                                                                                                                                 | M3 to M8 (M10 limited), dia. 2 to 8 mm (dia. 10 mm limited) / #4 to 5/16", (7/16" limited), dia. 14 ga to 5/16" (dia. 3/8" limited)                                                                                                                                                                                                     | M3 to M10, dia. 3 to 10 mm / #4 to 7/16", #4 to 3/8"                                                                                                                                                                                                                                                                                            |
| <b>Welding rate</b>                     | M3 / #4 = 40 studs/min. (voltage 60 V)<br>M8 / 5/16" = 14 studs/min. (voltage 200 V)                                                                                                                                                                                                                                                    | M3 / #4 = 33 studs/min. (voltage 60 V)<br>M8 / 5/16" = 12 studs/min. (voltage 170 V)<br>M10 / 7/16" = 9 studs/min. (voltage 210 V)                                                                                                                                                                                                      | M3 / #4 = 20 studs/min. (voltage 50 V)<br>M8 / 5/16" = 10 studs/min. (voltage 140 V)<br>M10 / 7/16" = 6 studs/min. (voltage 200 V)                                                                                                                                                                                                              |
| <b>Capacitance</b>                      | 66 000 µF                                                                                                                                                                                                                                                                                                                               | 99 000 µF                                                                                                                                                                                                                                                                                                                               | 132 000 µF                                                                                                                                                                                                                                                                                                                                      |
| <b>Welding time</b>                     | 1 to 3 ms                                                                                                                                                                                                                                                                                                                               | 1 to 3 ms                                                                                                                                                                                                                                                                                                                               | 1 to 3 ms                                                                                                                                                                                                                                                                                                                                       |
| <b>Energy</b>                           | 1600 Ws                                                                                                                                                                                                                                                                                                                                 | 2400 Ws                                                                                                                                                                                                                                                                                                                                 | 3200 Ws                                                                                                                                                                                                                                                                                                                                         |
| <b>Charging voltage</b>                 | 50 to 220 V (stepless voltage regulation)                                                                                                                                                                                                                                                                                               | 50 to 220 V (stepless voltage regulation)                                                                                                                                                                                                                                                                                               | 50 to 220 V (stepless voltage regulation)                                                                                                                                                                                                                                                                                                       |
| <b>Primary power</b>                    | 230 V/115 V*, 50/60 Hz, 10 AT (slow blow)<br>*alternative primary power see „Order No.“                                                                                                                                                                                                                                                 | 230 V/115 V*, 50/60 Hz, 10 AT (slow blow)<br>*alternative primary power see „Order No.“                                                                                                                                                                                                                                                 | 230 V/115 V*, 50/60 Hz, 10 AT (slow blow)<br>*alternative primary power see „Order No.“                                                                                                                                                                                                                                                         |
| <b>Connected load</b>                   | 600 VA                                                                                                                                                                                                                                                                                                                                  | 600 VA                                                                                                                                                                                                                                                                                                                                  | 600 VA                                                                                                                                                                                                                                                                                                                                          |
| <b>Power source</b>                     | Capacitor                                                                                                                                                                                                                                                                                                                               | Capacitor                                                                                                                                                                                                                                                                                                                               | Capacitor                                                                                                                                                                                                                                                                                                                                       |
| <b>Cooling type</b>                     | F (temperature controlled cooling fan)                                                                                                                                                                                                                                                                                                  | F (temperature controlled cooling fan)                                                                                                                                                                                                                                                                                                  | F (temperature controlled cooling fan)                                                                                                                                                                                                                                                                                                          |
| <b>IP Code</b>                          | IP 23                                                                                                                                                                                                                                                                                                                                   | IP 23                                                                                                                                                                                                                                                                                                                                   | IP 23                                                                                                                                                                                                                                                                                                                                           |
| <b>Dimension LxWxH (without handle)</b> | 400 x 205 x 250 mm / 15.75" x 8.07" x 9.84"                                                                                                                                                                                                                                                                                             | 480 x 205 x 250 mm / 18.90" x 8.07" x 9.84"                                                                                                                                                                                                                                                                                             | 480 x 205 x 250 mm / 18.90" x 8.07" x 9.84"                                                                                                                                                                                                                                                                                                     |
| <b>Weight</b>                           | 14 kg / 30.87 lbs                                                                                                                                                                                                                                                                                                                       | 17 kg / 37.48 lbs                                                                                                                                                                                                                                                                                                                       | 18 kg / 39.68 lbs                                                                                                                                                                                                                                                                                                                               |
| <b>Suitable guns</b>                    | C 08, CA 08, CI 03                                                                                                                                                                                                                                                                                                                      | C 08, CA 08                                                                                                                                                                                                                                                                                                                             | C 08, CA 08                                                                                                                                                                                                                                                                                                                                     |



| Order No.                  | Order No.                  | Order No.                  |
|----------------------------|----------------------------|----------------------------|
| <b>92-10-1502B</b> (230 V) | <b>92-10-2302B</b> (230 V) | <b>92-10-3102B</b> (230 V) |
| <b>92-12-1502B</b> (115 V) | <b>92-12-2302B</b> (115 V) | <b>92-12-3102B</b> (115 V) |
| <b>92-13-1502B</b> (100 V) | <b>92-13-2302B</b> (100 V) | <b>92-13-3102B</b> (100 V) |

**92-40-095** (ground cable, 2.5 m, 25 mm<sup>2</sup>, 2 vice grips 10")

**92-40-095** (ground cable, 2.5 m, 25 mm<sup>2</sup>, 2 vice grips 10")

**92-40-095** (ground cable, 2.5 m, 25 mm<sup>2</sup>, 2 vice grips 10")

For CI 03:  
**92-40-091** (ground cable, 6.7 m, 16 mm<sup>2</sup>, 1 vice grip 10")

Legend Welding process: CD = Capacitor discharge stud welding

 Mild steel  Stainless steel  Aluminium  Brass

### C 06-3

### C 08

### CA 08


### CI 03



1)  
2)

- Easy handling
- No setting for lift and spring pressure
- Aluminium to M4 (#8)

M3 to M6  
#4 to 1/4"



3)  
4)

- All-rounder also used for welding galvanised base material
- Aluminium to M4 (#8)

M3 to M8 (M10)  
#4 to 5/16" (7/16")



5)  
6)

- Used to avoid rear side marking on thin sheets
- Aluminium to M6 (1/4")
- Brass to M4 (#8)

M3 to M8 (M10)  
#4 to 5/16" (7/16")



- Especially suitable for welding of cupped head pins (HVAC)

Dia. 2/2.7 mm  
14 ga/12 ga

|                                 |                                                                                       |                                                                                                                         |                                                                                                                         |                                                                  |
|---------------------------------|---------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|
| Suitable stud welding unit      | Pegasar 500 accu, Pegasar 500 accu Insulation                                         | CDi series, CDMi series                                                                                                 | CDi series, CDMi series                                                                                                 | CDi 1502, Pegasar 500 accu Insulation                            |
| Welding process                 | CD (contact)                                                                          | CD (contact)                                                                                                            | CD (gap)                                                                                                                | CD (contact)                                                     |
| Stud material                   |                                                                                       |                                                                                                                         |                                                                                                                         |                                                                  |
| Welding range                   | M3 to M6, dia. 2 to 6 mm / #4 to 1/4", dia. 14 ga to 1/4"                             | M3 to M8 (M10 with special equipment), dia. 2 to 8 mm / #4 to 5/16" (7/16" with special equipment), dia. 14 ga to 5/16" | M3 to M8 (M10 with special equipment), dia. 2 to 8 mm / #4 to 5/16" (7/16" with special equipment), dia. 14 ga to 5/16" | Cupped head pins dia. 2/2.7 mm / 14 ga/12 ga                     |
| Stud length                     | 6 to 40 mm / 0.24" to 1.57"; longer studs (> 40 mm / 1.57") with optional accessories | 6 to 40 mm / 0.24" to 1.57"; longer studs with optional accessories                                                     | 6 to 40 mm / 0.24" to 1.57"; longer studs with optional accessories                                                     | 9.5 to 152.4 mm / 0.37" to 6.00"                                 |
| Stud type                       | Any type or shape (special chucks if required)                                        | Any type or shape (special chucks if required)                                                                          | Any type or shape (special chucks if required)                                                                          | Cupped head pins                                                 |
| Lift                            | --                                                                                    | --                                                                                                                      | Adjustment range 4.5 mm / 0.18", lockable                                                                               | --                                                               |
| Spring pressure                 | --                                                                                    | Adjustable, arresting                                                                                                   | Adjustable, arresting                                                                                                   | Adjustable, arresting                                            |
| Welding cable                   | 3 m / 9.84'; 25 mm <sup>2</sup> , SK 50                                               | 6.5 m / 21.33'; 25 mm <sup>2</sup> , SK 50                                                                              | 3 m / 9.84'; 25 mm <sup>2</sup> , SK 50                                                                                 | 9.3 m / 30.51'; 6 mm <sup>2</sup> , SK 50                        |
| IP Code                         | IP 20                                                                                 | IP 20                                                                                                                   | IP 20                                                                                                                   | IP 20                                                            |
| Workplace noise level           | > 90 dB (A) may occur during welding                                                  | > 90 dB (A) may occur during welding                                                                                    | > 90 dB (A) may occur during welding                                                                                    | > 90 dB (A) may occur during welding                             |
| Dimension LxWxH (without cable) | 170 x 40 x 140 mm / 6.70" x 1.57" x 5.51"                                             | 170 x 40 x 140 mm / 6.70" x 1.57" x 5.51"                                                                               | 190 x 40 x 140 mm / 7.48" x 1.57" x 5.51"                                                                               | 175 x 50 x 145 mm / 6.89" x 1.97" x 5.71" (without leg assembly) |
| Weight (without cable)          | 0.5 kg / 1.10 lbs                                                                     | 0.5 kg / 1.10 lbs                                                                                                       | 0.7 kg / 1.54 lbs                                                                                                       | 0.7 kg / 1.54 lbs                                                |

#### Order No.

- <sup>1)</sup> 92-20-275 (Tripod)  
<sup>2)</sup> 92-20-288 (PPR-2/CD)

92-40-050 (Accessories up to 6 mm – chucks M3 to M6, socket wrench)  
92-40-118 (Accessories up to 1/4" – chucks #4, #6, #8, #10, 1/4", socket wrench)



#### Order No.

- <sup>3)</sup> 92-20-256 (Tripod)  
<sup>4)</sup> 92-20-286 (PPR-2/CD)

92-40-018 (Accessories CD M3 to M8)



#### Order No.

- <sup>5)</sup> 92-20-255 (Tripod)  
<sup>6)</sup> 92-20-285 (PPR-2/CD)


92-40-018 (Accessories CD M3 to M8)



#### Order No.

92-20-254

92-40-063A (Accessories for cupped head pins)



Application:  
Cupped head pins  
Welded with gun CI 03

#### Legend

Welding process: CD = Capacitor discharge stud welding

Mild steel Stainless steel Aluminium Brass

## CDi 1502

| CDi 1502<br>with C 08                                                              | Order No.: CDi1502C+<br>includes:                   | CDi 1502<br>with CA 08                                                              | Order No.: CDi1502CA+<br>includes:                  |
|------------------------------------------------------------------------------------|-----------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------|
|   | CDi 1502 230 V<br>Order No. 92-10-1502B             |    | CDi 1502 230 V<br>Order No. 92-10-1502B             |
|   | C 08<br>Order No. 92-20-256                         |    | CA 08<br>Order No. 92-20-255                        |
|   | Ground cable<br>Order No. 92-40-095                 |   | Ground cable<br>Order No. 92-40-095                 |
|  | Gun accessories<br>3 to 8 mm<br>Order No. 92-40-018 |  | Gun accessories<br>3 to 8 mm<br>Order No. 92-40-018 |

## CDi 2302

| CDi 2302<br>with C 08                                                               | Order No.: CDi2302C+<br>includes:                   | CDi 2302<br>with CA 08                                                               | Order No.: CDi2302CA+<br>includes:                  |
|-------------------------------------------------------------------------------------|-----------------------------------------------------|--------------------------------------------------------------------------------------|-----------------------------------------------------|
|  | CDi 2302 230 V<br>Order No. 92-10-2302B             |   | CDi 2302 230 V<br>Order No. 92-10-2302B             |
|  | C 08<br>Order No. 92-20-256                         |   | CA 08<br>Order No. 92-20-255                        |
|  | Ground cable<br>Order No. 92-40-095                 |  | Ground cable<br>Order No. 92-40-095                 |
|  | Gun accessories<br>3 to 8 mm<br>Order No. 92-40-018 |  | Gun accessories<br>3 to 8 mm<br>Order No. 92-40-018 |

## CDi 3102

| CDi 3102<br>with C 08                                                              | Order No.: CDi3102C+<br>includes:                   |
|------------------------------------------------------------------------------------|-----------------------------------------------------|
|   | CDi 3102 230 V<br>Order No. 92-10-3102B             |
|   | C 08<br>Order No. 92-20-256                         |
|   | Ground cable<br>Order No. 92-40-095                 |
|  | Gun accessories<br>3 to 8 mm<br>Order No. 92-40-018 |

| CDi 3102<br>with CA 08                                                              | Order No.: CDi3102CA+<br>includes:                  |
|-------------------------------------------------------------------------------------|-----------------------------------------------------|
|    | CDi 3102 230 V<br>Order No. 92-10-3102B             |
|    | CA 08<br>Order No. 92-20-255                        |
|   | Ground cable<br>Order No. 92-40-095                 |
|  | Gun accessories<br>3 to 8 mm<br>Order No. 92-40-018 |

## CDi 1502 Insulation

| CDi 1502<br>with CI 03                                                              | Order No.: CDi1502CI+<br>includes:            |
|-------------------------------------------------------------------------------------|-----------------------------------------------|
|  | CDi 1502 230 V<br>Order No. 92-10-1502B       |
|  | CI 03<br>Order No. 92-20-254                  |
|  | Ground cable<br>Order No. 92-40-091           |
|  | Gun accessories CI 03<br>Order No. 92-40-063A |

## Pegasar 500 accu

| Pegasar 500 accu<br>with C 06-3                                                      | Order No.: P500accu+<br>includes:                   |
|--------------------------------------------------------------------------------------|-----------------------------------------------------|
|   | Pegasar 500 accu<br>Order No. 92-10-0500            |
|   | C 06-3<br>Order No. 92-20-275                       |
|  | Ground cable<br>Order No. 92-40-154                 |
|   | Accu 150<br>Order No. 88-23-484                     |
|  | Toolbag<br>Order No. 88-24-466                      |
|  | Gun accessories<br>3 to 6 mm<br>Order No. 92-40-050 |

# Mounting heat cost allocators

## Systems for capacitor discharge



### ACCU-TWIN



Battery powered

- Especially suitable for welding heat costs measurement systems through twin stud welding

2 x M3

|                          |                                                                                                                                                                     |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Welding process          | CD                                                                                                                                                                  |
| Welding material         |   |
| Welding range            | 2 x M3                                                                                                                                                              |
| Welding rate             | 2 twin welds per minute                                                                                                                                             |
| Capacitor charging time  | approx. 30 sec                                                                                                                                                      |
| Battery                  | 12 V, 5 Ah                                                                                                                                                          |
| Battery capacity         | 200 twin M3 welds                                                                                                                                                   |
| Battery charging time    | Max. 10 hours                                                                                                                                                       |
| Battery life             | Min. 200 charging cycles                                                                                                                                            |
| Stud spacing             | Stepless adjustable from 25 mm up to 61 mm (from 19 mm upon request)                                                                                                |
| Welding gun cable length | approx. 1.1 m                                                                                                                                                       |
| Capacitance              | 80 000 µF                                                                                                                                                           |
| Energy                   | 325 Ws                                                                                                                                                              |
| Charging voltage         | Max. 90 V                                                                                                                                                           |
| Power source             | Capacitor                                                                                                                                                           |
| Dimension LxWxH          | 360 x 135 x 210 mm (Gun 165 x 25 x 95 mm)                                                                                                                           |
| Weight                   | 7 kg (incl. welding gun - 550 g)                                                                                                                                    |
| Gun                      | Supplied fixed - non interchangeable                                                                                                                                |

#### Order No.

92-10-2380A (including toolbag, grinder, power supply cable, cable for 12 V car connection and assortment box)



#### Legend

Welding process: CD = Capacitor discharge stud welding



Mild steel



Stainless steel



# Mounting heat cost allocators

Systems for capacitor discharge

1

Systems for **manual** applications - **CD**



Grinding equipment to remove paint on the radiator



Two charging options:  
power supply cable and  
cable for 12 V car connection



Assortment box for accessories in tool pocket



Magnetic storage box for quick access to studs

## ARC

### Drawn arc (ARC) stud welding with ceramic ferrule or shielding gas

The process drawn arc stud welding is mostly used for stud diameters of 3 to 25 mm and a welding time of 100 to 1 500 ms.

Drawn arc stud welding with ceramic ferrule is recommended for studs with diameter of more than 12 mm. If it is required to protect the weld pool from atmosphere, shielding gas should be used. This process variant is also used with automated applications.



Welding process with ceramic ferrule: Joining of stud-type welding elements with a diameter 2 to 25 mm (M24) onto thicker sheets of about 2 mm or higher. Mild steel and stainless steel



The welding stud is lifted and a secondary arc (pilot arc) of low current is ignited between stud tip and workpiece.



Then the ignition of the main arc is carried out. Stud and workpiece are melted. The stud is moved to the workpiece, the two molten zones join.



The molten areas solidify. The short and clean welding process does not require any machining.



As a result, an even joint strength is achieved which is above the stud and base material.

**Tremendous time and cost savings**  
**Unmatched economic efficiency with HBS**

### ARC

**Best Solution  
Best Results**



Specifically designed for thicker sheets of about 2 mm or higher. Application ranges: steel construction, engineering construction, shipbuilding industry, vehicle construction, structural and civil engineering.

ARC Drawn arc stud welding with ceramic ferrule, shielding gas or without weld pool protection.



## SC

### Short Cycle (SC) drawn arc stud welding

#### High current, shorter duration of welding time

The welding sequence is the same as the sequence of drawn arc welding (ARC), however, with relatively higher currents and shorter welding times (max. 100 ms). The short cycle drawn arc stud welding is very suitable for stud diameters up to 12 mm on thin metal sheets.


#### Also without shielding gas

Up to 8 mm stud diameter, the process is often carried out without weld pool protection. Normally studs with flange are used to achieve high tensile strengths in spite of pores in the weld zone.

The short cycle process is especially suitable for welding of material combinations like steel (base material), stainless steel (stud) as well as aluminium. To achieve a high welding quality, use of shielding gas is recommended.



Joining of stud-type welding elements with a diameter 2 to 12 mm onto thin sheets, min. 0.5 mm. Mild steel, stainless steel and aluminium.

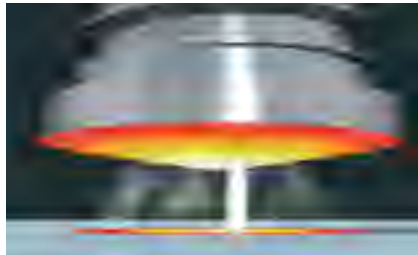

The welding stud is lifted and a secondary arc (pilot arc) of low current is ignited between stud tip and workpiece.



Then the ignition of the main arc is carried out. Stud and workpiece are melted. The stud is moved to the workpiece, the two molten zones join.



The molten areas solidify. The short and clean welding process does not require any machining.



The low thermal, accurate load provides welding onto thin sheets.

### Best results Best price-performance ratio



# Short cycle stud welding

2



**SC**

**Best Solution  
Best Results**



Multiple applications with:  
studs, tapped pads and pins  
onto thin metal sheets. A wide  
field of application is in vehicle  
construction, in particular  
using fir tree studs to fasten  
conduits and trims.



With ARC and IT stud  
welding units for short cycle  
drawn arc stud welding.  
(with and without shielding  
gas).

Systems for **manual** applications - **ARC/SC**

## IT Inverter technology for drawn arc and short cycle

The first complete inverter series with welding current up to 2600 A.

### Best welding quality

Very high arc stability even at weak welding current. In this way, a constantly optimized welding quality is achieved even with large mains voltage fluctuations.

### Ahead of competition by dynamics

Dynamic regulation of the welding process through high process reliability and consistency.

### Highly cost effective

The innovative inverter welding power source provides a higher efficiency of 80 % compared with conventional power sources. In this way, energy consumption is reduced by 50 % (smaller generators = 50 % less diesel fuel consumption).



Realisation of highest quality demands, even welding on difficult geometrical shapes.

### Top in:

- Outstanding welding quality – very high arc stability
- Process monitoring
- Compact, highly mobility
- Up to 100 % higher welding rate compared with conventional transformer machines





## HBS EFFICIENT TECHNOLOGY



**Reduces energy consumption and weight.**

**Increases welding quality and welding rate.**

Innovative and future-oriented technology, integrated in the compact and very mobile inverter welding units from HBS.

**HBS inverter technology means:**


**Maximum** welding quality

**Maximum** welding rates

**Minimum** energy consumption


**Minimum** weight

**Maximum** efficiency



### Quality

**Best** welding quality through extremely high stability of the arc, even at weak welding currents or large fluctuations of the mains voltage.



### Welding rates

**Highest** welding rates – increased by 100 % compared to standard conventional transformer technology.



### Energy consumption

**Minimized** energy consumption – energy needed is reduced by 50 % compared to standard welding units with transformer technology.



### Weight

**Minimized** weight – inverter technology reduces the weight by 50 % compared to welding units with transformer technology.



### Degree of efficiency

**Maximum** degree of efficiency – innovative inverter technology offers best input / output ratio.

# Configuration

Drawn arc stud welding with ceramic ferrule -  
up to M16 / 5/8" (type RD)



| Material                                           | Diameter  | Catalogue        |
|----------------------------------------------------|-----------|------------------|
|                                                    | M6 to M24 | Welding elements |
| <b>Type RD</b><br>Threaded stud with reduced shaft |           |                  |

| Material                                             | Diameter  | Catalogue        |
|------------------------------------------------------|-----------|------------------|
|                                                      | M6 to M16 | Welding elements |
| <b>Type MD (DD)</b><br>Virtually fully-threaded stud |           |                  |

| Material                                  | Diameter  | Catalogue        |
|-------------------------------------------|-----------|------------------|
|                                           | M6 to M20 | Welding elements |
| <b>Type PD</b><br>Partially threaded stud |           |                  |

| Material                                | Diameter   | Catalogue        |
|-----------------------------------------|------------|------------------|
|                                         | 6 to 16 mm | Welding elements |
| <b>Type UD</b><br>Unthreaded stud (pin) |            |                  |

| Material                                          | Diameter                        | Catalogue        |
|---------------------------------------------------|---------------------------------|------------------|
|                                                   | M6/dia. 10 mm to M10/dia. 16 mm | Welding elements |
| <b>Type ID</b><br>Stud (pin) with internal thread |                                 |                  |

| Material                          | Diameter    | Catalogue        |
|-----------------------------------|-------------|------------------|
|                                   | 10 to 25 mm | Welding elements |
| <b>Type SD</b><br>Shear connector |             |                  |

| Material                                                                                                                                                                                | Welding range                               | Page |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|------|
|                                                                                                                                                                                         | M3 to M10 (Type RD)<br>#4 - 7/16" (Type RD) | 38   |
| <b>Visar 650</b><br>Tough! <b>Single phase</b> inverter (supply voltage range 100 to 240 V). Compact, lightweight with high protection class (IP 44) for welding without shielding gas. |                                             |      |

| Ground cable |
|--------------|
| 93-40-020    |
|              |

| Material                                                                           | Welding range                               | Page |
|------------------------------------------------------------------------------------|---------------------------------------------|------|
|                                                                                    | M3 to M12 (Type RD)<br>#4 to 1/2" (Type RD) | 40   |
| <b>ARC 800</b><br>Robust transformer for workshops and construction sites (IP 23). |                                             |      |

| Ground cable |
|--------------|
| 93-40-020    |
|              |

| Material                                                                                                                                  | Welding range                               | Page |
|-------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|------|
|                                                                                                                                           | M3 to M16 (Type RD)<br>#4 to 5/8" (Type RD) | 39   |
| <b>IT 1002</b><br>All-rounder for construction sites and workshops (IP 23). Precise welding results through advanced inverter technology. |                                             |      |

| Material                                                                                                                                                            | Welding range           | Page |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|------|
|   | M3 to M12<br>#4 to 1/2" | 46   |



**A 12** with ceramic leg assembly PSC-1  
*All-rounder for workshop use.*  
Compact gun with easy set-up.  
Length compensation for stable welding results.

| Material                                                                                                                                                            | Welding range           | Page |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|------|
|   | M3 to M12<br>#4 to 1/2" | 46   |



**A 12-FL**  
*All-rounder for workshop use.*  
Compact gun with very easy set-up without length compensation.

**Ceramic leg assembly PSC-1**  
93-40-022



| Material                                                                                                                                                                | Welding range           | Page |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|------|
|   | M3 to M12<br>#4 to 1/2" | 46   |



**A 12** with ceramic leg assembly PSC-1  
*All-rounder for workshop use.*  
Compact gun with easy set-up.  
Length compensation for stable welding results.

**Accessories**  
**ARC ceramic**  
Page 42 - 45



| Material                                                                                                                                                                | Welding range             | Page |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|------|
|   | M3 to M12 mm<br>#4 - 1/2" | 46   |



**A 12-FL**  
*All-rounder for workshop use.*  
Compact gun with very easy set-up without length compensation.

**Ceramic leg assembly PSC-1**  
93-40-022



| Material                                                                                                                                                                | Welding range               | Page |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|------|
|   | Dia. 3 - 16 mm<br>#4 - 5/8" | 48   |



**A 16**  
*All-rounder for construction sites*  
Robust gun with plunge damper and length compensation.  
Level on rear of gun to line studs level.

**Ceramic leg assembly PSC-2**  
Page 42 - 45



| Legend                                                                                |                        |
|---------------------------------------------------------------------------------------|------------------------|
| Material                                                                              | Stud-/Welding material |
|  | Mild steel             |
|  | Stainless steel        |

# Configuration

Drawn arc stud welding with ceramic ferrule -  
up to M24 (dia. 25 mm) / 1"



| Material                                               | Diameter  | Catalogue        |
|--------------------------------------------------------|-----------|------------------|
|                                                        | M6 to M24 | Welding elements |
| <b>Type RD</b><br><br>Threaded stud with reduced shaft |           |                  |

| Material                                                 | Diameter  | Catalogue        |
|----------------------------------------------------------|-----------|------------------|
|                                                          | M6 to M16 | Welding elements |
| <b>Type MD (DD)</b><br><br>Virtually fully threaded stud |           |                  |

| Material                                      | Diameter  | Catalogue        |
|-----------------------------------------------|-----------|------------------|
|                                               | M6 to M20 | Welding elements |
| <b>Type PD</b><br><br>Partially threaded stud |           |                  |

| Material                                    | Diameter   | Catalogue        |
|---------------------------------------------|------------|------------------|
|                                             | 6 to 16 mm | Welding elements |
| <b>Type UD</b><br><br>Unthreaded stud (pin) |            |                  |

| Material                                              | Diameter                        | Catalogue        |
|-------------------------------------------------------|---------------------------------|------------------|
|                                                       | M6/Dia. 10 mm to M10/Dia. 16 mm | Welding elements |
| <b>Type ID</b><br><br>Stud (pin) with internal thread |                                 |                  |

| Material                              | Diameter    | Catalogue        |
|---------------------------------------|-------------|------------------|
|                                       | 10 to 25 mm | Welding elements |
| <b>Type SD</b><br><br>Shear connector |             |                  |

| Material                                                                                                 | Welding range         | Page |
|----------------------------------------------------------------------------------------------------------|-----------------------|------|
|                                                                                                          | M3 to M24<br>#4 to 1" | 39   |
| <br><b>IT 2002</b><br>Energy package for larger studs, used on construction sites and workshops (IP 23). |                       |      |

**Ground cable**  
for welding elements to M20 (2 pcs.)  
93-40-019



**Ground cable**  
for welding elements to M22 (2 pcs.)  
93-40-072



| Material                                                                                                                                                            | Welding range           | Page |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|------|
|   | M3 to M12<br>#4 to 1/2" | 46   |

 **A 12** with ceramic leg assembly PSC-1  
*All-rounder for workshop use.*  
Compact gun with easy set-up and length compensation for stable welding results.

| Material                                                                                                                                                            | Welding range           | Page |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|------|
|   | M3 to M12<br>#4 to 1/2" | 46   |

 **A 12-FL**  
*All-rounder for workshop use.*  
Compact gun with very easy set-up without length compensation.

| Material                                                                                                                                                                | Welding range                 | Page |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|------|
|   | Dia. 3 to 16 mm<br>#4 to 5/8" | 48   |

 **A 16**  
*All-rounder for construction sites.*  
Robust gun with plunge damper and length compensation. Level on rear of gun to line studs level.

| Material                                                                                                                                                                | Welding range                                       | Page |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|------|
|   | Dia. 14 to 22 mm (25 mm)<br>Dia. 9/16" to 7/8" (1") | 48   |

 **A 22**  
*Heavy duty gun for construction sites.*  
Robust gun with plunge damper and length compensation.

**Ceramic leg assembly PSC-1**  
93-40-022



**Accessories**  
**ARC ceramic**  
Page 42 - 45



**Ceramic leg assembly PSC-2**  
Page 42 - 45



| Legend                                                                                |                        |
|---------------------------------------------------------------------------------------|------------------------|
| Material                                                                              | Stud-/Welding material |
|  | Mild steel             |
|  | Stainless steel        |

# Configuration

Drawn arc stud welding with shielding gas



| Material                                           | Diameter  | Catalogue        |
|----------------------------------------------------|-----------|------------------|
|                                                    | M6 to M16 | Welding elements |
| <b>Type RD</b><br>Threaded stud with reduced shaft |           |                  |

| Material                                             | Diameter  | Catalogue        |
|------------------------------------------------------|-----------|------------------|
|                                                      | M6 to M16 | Welding elements |
| <b>Type MD (DD)</b><br>Virtually fully-threaded stud |           |                  |

| Material                                  | Diameter  | Catalogue        |
|-------------------------------------------|-----------|------------------|
|                                           | M6 to M20 | Welding elements |
| <b>Type PD</b><br>Partially threaded stud |           |                  |

| Material                                | Diameter   | Catalogue        |
|-----------------------------------------|------------|------------------|
|                                         | 6 to 16 mm | Welding elements |
| <b>Type UD</b><br>Unthreaded stud (pin) |            |                  |

| Material                                          | Diameter                        | Catalogue        |
|---------------------------------------------------|---------------------------------|------------------|
|                                                   | M6/Dia. 10 mm to M10/Dia. 16 mm | Welding elements |
| <b>Type ID</b><br>Stud (pin) with internal thread |                                 |                  |

| Material                                                                                                                                                                                                   | Welding range                                | Page |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|------|
|                                                                                                                                                                                                            | M3 to M10 (Type RD)<br>#4 to 7/16" (Type RD) | 38   |
| <b>Visar 650 with shielding gas</b><br>Tough! <b>Single phase</b> inverter (supply voltage range 100 to 240 V).<br>Compact, lightweight with high protection class (IP 44) for welding with shielding gas. |                                              |      |

|                                      |
|--------------------------------------|
| <b>Ground cable</b><br>93-40-020<br> |
|--------------------------------------|

| Material                                                                           | Welding range                               | Page |
|------------------------------------------------------------------------------------|---------------------------------------------|------|
|                                                                                    | M4 to M12 (Type RD)<br>#8 to 1/2" (Type RD) | 40   |
| <b>ARC 800</b><br>Robust transformer for workshops and construction sites (IP 23). |                                             |      |

|                                      |
|--------------------------------------|
| <b>Ground cable</b><br>93-40-020<br> |
|--------------------------------------|

| Material                                                                                                                                     | Welding range                               | Page |
|----------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|------|
|                                                                                                                                              | M3 to M16 (Type RD)<br>#4 to 5/8" (Type RD) | 39   |
| <b>IT 1002</b><br>All-rounder for construction sites and workshops (IP 23).<br>Precise welding results through advanced inverter technology. |                                             |      |

|                                                                              |
|------------------------------------------------------------------------------|
| <b>Ground cable</b><br>for welding elements to M20 (2 pcs.)<br>93-40-019<br> |
|------------------------------------------------------------------------------|

| Material                                                                                            | Welding range         | Page |
|-----------------------------------------------------------------------------------------------------|-----------------------|------|
|                                                                                                     | M3 to M24<br>#4 to 1" | 39   |
| <b>IT 2002</b><br>Energy package for larger studs, used on construction sites and workshops (IP 23) |                       |      |

| Material                                                                                                                                                            | Welding range           | Page |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|------|
|   | M3 to M12<br>#4 to 1/2" | 46   |

 **A 12** with shielding gas leg assembly PSS-2  
*All-rounder for workshop use.*  
Small, compact gun with easy set-up.  
Length compensation for stable welding results.

| Material                                                                                                                                                            | Welding range           | Page |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|------|
|   | M3 to M12<br>#4 to 1/2" | 46   |

 **A 12-FL**  
*All-rounder for workshop use.*  
Compact gun with very easy set-up without length compensation.

| Material                                                                                                                                                              | Welding range           | Page |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|------|
|   | M3 to M12<br>#4 to 1/2" | 46   |

 **A 12** with shielding gas leg assembly PSS-2  
*All-rounder for workshop use.*  
Small, compact gun with easy set-up.  
Length compensation for stable welding results.

| Material                                                                                                                                                                | Welding range              | Page |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------|
|   | M3 to M12 mm<br>#4 to 1/2" | 46   |

 **A 12-FL**  
*All-rounder for workshop use.*  
Compact gun with very easy set-up without length compensation.

| Material                                                                                                                                                                | Welding range                 | Page |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|------|
|   | Dia. 3 to 16 mm<br>#4 to 5/8" | 48   |

 **A 16**  
*All-rounder for construction sites*  
Robust gun with plunge damper and length compensation. Level on rear of gun to line studs level.

**Shielding gas leg assembly PSS-2**  
93-40-021



**Accessories shielding gas**  
Page 46 / 48



**Shielding gas leg assembly PSS-2**  
93-40-021



**Shielding gas leg assembly PSS-3**  
93-40-017



| Legend                                                                                |                        |
|---------------------------------------------------------------------------------------|------------------------|
| <b>Material</b>                                                                       | Stud-/Welding material |
|  | Mild steel             |
|  | Stainless steel        |

# Configuration

## Short cycle stud welding



| Material                                                                                                                      | Diameter | Catalogue        |
|-------------------------------------------------------------------------------------------------------------------------------|----------|------------------|
|                                                                                                                               | M5 to M8 | Welding elements |
|  <b>Type PS</b><br>Threaded stud with flange |          |                  |

| Material                                                                                                                            | Diameter | Catalogue        |
|-------------------------------------------------------------------------------------------------------------------------------------|----------|------------------|
|                                                                                                                                     | M6 to M8 | Welding elements |
|  <b>Type SC</b><br>Paint clearing stud with flange |          |                  |

| Material                                                                                                                        | Diameter | Catalogue        |
|---------------------------------------------------------------------------------------------------------------------------------|----------|------------------|
|                                                                                                                                 | 5 mm     | Welding elements |
|  <b>Type SC</b><br>Fir tree stud with flange |          |                  |

| Material                                                                                                                    | Diameter  | Catalogue        |
|-----------------------------------------------------------------------------------------------------------------------------|-----------|------------------|
|                                                                                                                             | 3 to 8 mm | Welding elements |
|  <b>Type US</b><br>Unthreaded stud (pin) |           |                  |

| Material                                                                                                                              | Diameter                       | Catalogue        |
|---------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|------------------|
|                                                                                                                                       | M3/Dia. 5 mm -<br>M6/Dia. 8 mm | Welding elements |
|  <b>Type IS</b><br>Stud (pin) with internal thread |                                |                  |

| Material                                                                                                                                                                                                                                                                  | Welding range                            | Page |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|------|
|                                                                                                                                                                                                                                                                           | M3 to M6 (for SC)<br>#4 to 1/4" (for SC) | 38   |
|  <b>Visar 650</b><br>Tough! <b>Single phase</b> inverter (supply voltage range 100 to 240 V). Compact, lightweight with high protection class (IP 44) for welding without shielding gas. |                                          |      |

Ground cable  
93-40-020



| Material                                                                                                                                                                                                                                                                             | Welding range                            | Page |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|------|
|                                                                                                                                                                                                                                                                                      | M3 to M6 (for SC)<br>#4 to 1/4" (for SC) | 38   |
|  <b>Visar 650 mit Schutzgas</b><br>Tough! <b>Single phase</b> inverter (supply voltage range 100 to 240 V). Compact, lightweight with high protection class (IP 44) for welding with shielding gas. |                                          |      |

Ground cable  
93-40-020



| Material                                                                                                                                                               | Welding range                             | Page |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|------|
|                                                                                                                                                                        | M4 to M8 (for SC)<br>#8 to 5/16" (for SC) | 40   |
|  <b>ARC 800</b><br>Robust transformer for workshops and construction sites (IP 23). |                                           |      |

Ground cable  
93-40-020



| Material                                                                                                                                                                                                                      | Welding range                              | Page |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|------|
|                                                                                                                                                                                                                               | M3 to M10 (for SC)<br>#4 to 7/16" (for SC) | 39   |
|  <b>IT 1002</b><br>All-rounder for construction sites and workshops (IP 23). Precise welding results through advanced inverter technology. |                                            |      |

| Material                                                                                                                                                                                                                                                                                                                                               | Welding range                              | Page |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|------|
|                                                                                                                                                                                                                                                                                                                                                        | M3 to M12 (for SC)<br>#4 to 7/16" (for SC) | 39   |
|  <b>IT 90</b><br>Inverter (2000 A) with options for 4 outputs, process monitoring and shielding gas. Precise results through inverter technology for use with SC on thin sheets and critical surfaces (e.g. galvanised) and drawn arc to stud size of 22 mm (7/8"). |                                            |      |

Ground cable  
for welding elements to M20 (2 pcs.)  
93-40-019



| Material | Welding range                                                                                                                                                                                                                                                      | Page |
|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|
|          | M3 to M6 (for SC)<br>#4 to 1/4" (for SC)                                                                                                                                                                                                                           | 46   |
|          | <b>A 12</b> with centering tube PPR-2/SC<br><i>All-rounder for workshop use for short cycle with templates.</i><br>Length compensation for stable welding results.<br>No shielding gas protection.                                                                 |      |
| Material | Welding range                                                                                                                                                                                                                                                      | Page |
|          | M3 to M8 (M10) (for SC)<br>#4 to 5/16" (7/16") (for SC)                                                                                                                                                                                                            | 46   |
|          | <b>A 12</b> with gas shroud PSS-1/SC<br><i>All-rounder for workshop use for short cycle with templates.</i><br>Length compensation for stable welding results.<br>With shielding gas protection.                                                                   |      |
| Material | Welding range                                                                                                                                                                                                                                                      | Page |
|          | M3 to M10 (for SC)<br>#4 to 7/16" (for SC)                                                                                                                                                                                                                         | 46   |
|          | <b>A 12</b> with shielding gas leg assembly PSS-2<br><i>All-rounder for workshop use. Small, compact gun with easy set-up.</i> Length compensation for stable welding results. Preferably stud length from 40 mm (1 1/2") with diameter greater than 8 mm (5/16"). |      |
| Material | Welding range                                                                                                                                                                                                                                                      | Page |
|          | M3 to M8 (M10) (for SC)<br>#4 to 5/16" (7/16") (for SC)                                                                                                                                                                                                            | 46   |
|          | <b>CA 08</b> with centering tube PPR-2/SC<br><i>Low cost entry-level version used for Short Cycle welding with templates.</i> Without length compensation and without shielding gas protection.                                                                    |      |
| Material | Welding range                                                                                                                                                                                                                                                      | Page |
|          | M3 to M8 (M10) (for SC)<br>#4 to 5/16" (7/16") (for SC)                                                                                                                                                                                                            | 46   |
|          | <b>A 12</b> with centering tube PPR-2/SC<br><i>All-rounder for workshop use for short cycle with templates.</i><br>Length compensation for stable welding results.<br>No shielding gas protection.                                                                 |      |
| Material | Welding range                                                                                                                                                                                                                                                      | Page |
|          | M3 to M8 (M10) (for SC)<br>#4 to 5/16" (7/16") (for SC)                                                                                                                                                                                                            | 46   |
|          | <b>CA 08</b> with gas shroud PSS-1/SC<br><i>Low cost entry-level version used for Short Cycle welding with templates.</i><br>Without length compensation. With shielding gas protection.                                                                           |      |
| Material | Welding range                                                                                                                                                                                                                                                      | Page |
|          | M3 to M8 (M10) (for SC)<br>#4 to 5/16" (7/16") (for SC)                                                                                                                                                                                                            | 46   |
|          | <b>A 12</b> with gas shroud PSS-1/SC<br><i>All-rounder for workshop use for short cycle with templates.</i><br>Length compensation for stable welding results.<br>With shielding gas protection.                                                                   |      |
| Material | Welding range                                                                                                                                                                                                                                                      | Page |
|          | M3 to M10 (for SC)<br>#4 to 7/16" (for SC)                                                                                                                                                                                                                         | 46   |
|          | <b>A 12</b> with shielding gas leg assembly PSS-2<br><i>All-rounder for workshop use. Small, compact gun with easy set-up.</i> Length compensation for stable welding results. Preferably stud length from 40 mm (1 1/2") with diameter greater than 8 mm (5/16"). |      |

Accessories  
Page 46



Accessories  
Page 46



Accessories  
Page 46



Accessories  
Page 46



| Legend   |                        |
|----------|------------------------|
| Material | Stud-/Welding material |
|          | Mild steel             |
|          | Stainless steel        |
|          | Aluminium              |

Inverter technology

Outstanding  
welding quality

Extremely stable arc

### Visar 650

### Visar 650 shielding gas version

NEW

- Tough! Single phase inverter (supply voltage range 100 to 240 V)
- Compact, lightweight with high protection class (IP 44)

M3 to M10 (type RD)  
#4 to 7/16" (type RD)

- Tough! Single phase inverter (supply voltage range 100 to 240 V)
- Compact, lightweight with high protection class (IP 44)

M3 to M10 (type RD)  
#4 to 7/16" (type RD)

|                                     |                                                                                                                                                                     |                                                                                                                                                                                                                                                           |
|-------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Welding process                     | ARC, SC                                                                                                                                                             | ARC, SC                                                                                                                                                                                                                                                   |
| Welding material                    |   |    |
| Technology                          | Inverter                                                                                                                                                            | Inverter                                                                                                                                                                                                                                                  |
| Equipment                           |                                                                                                                                                                     |                                                                                                                                                                                                                                                           |
| Welding with ceramic ferrule        | X                                                                                                                                                                   | X                                                                                                                                                                                                                                                         |
| Welding with shielding gas          | --                                                                                                                                                                  | X                                                                                                                                                                                                                                                         |
| Process control                     | --                                                                                                                                                                  | --                                                                                                                                                                                                                                                        |
| Display                             | --                                                                                                                                                                  | LCD                                                                                                                                                                                                                                                       |
| Welding range                       | ARC: M3 to M10 (type RD), dia. 2 to 8 mm /<br>#4 to 7/16" (type RD), dia. 14 ga to 5/16"<br>SC: M3 to M6, dia. 2 to 6 mm /<br>#4 to 1/4", dia. 14 ga to 1/4"        | ARC: M3 to M10 (type RD), dia. 2 to 8 mm /<br>#4 to 7/16" (type RD), dia. 14 ga to 5/16"<br>SC: M3 to M6, dia. 2 to 6 mm /<br>#4 to 1/4", dia. 14 ga to 1/4"                                                                                              |
| Welding rate                        | M3 / #4 = 40 studs/min<br>M8 / 5/16" = 12 studs/min.                                                                                                                | M3 / #4 = 40 studs/min<br>M8 / 5/16" = 12 studs/min                                                                                                                                                                                                       |
| Welding current                     | 650 A (max.)                                                                                                                                                        | 650 A (max.)                                                                                                                                                                                                                                              |
| Current adjustment range            | 100 to 650 A                                                                                                                                                        | 100 to 650 A                                                                                                                                                                                                                                              |
| Welding time                        | 5 to 200 ms (stepless)                                                                                                                                              | 5 to 200 ms (stepless)                                                                                                                                                                                                                                    |
| Primary power                       | 100 to 240 V, 1 phase, 50/60 Hz, 16 AT (slow blow)                                                                                                                  | 100 to 240 V, 1 phase, 50/60 Hz, 16 AT (slow blow)                                                                                                                                                                                                        |
| Primary plug                        | 16 A, 2-pin grounded safety plug (plug type F;<br>CEE 7/4)                                                                                                          | 16 A, 2-pin grounded safety plug (plug type F;<br>CEE 7/4)                                                                                                                                                                                                |
| Connected load                      | 3 kVA                                                                                                                                                               | 3 kVA                                                                                                                                                                                                                                                     |
| Cooling type                        | F (temperature controlled cooling fan)                                                                                                                              | F (temperature controlled cooling fan)                                                                                                                                                                                                                    |
| IP Code                             | IP 44                                                                                                                                                               | IP 44                                                                                                                                                                                                                                                     |
| Dimension LxWxH<br>(without handle) | 474 x 337 x 351 mm / 18.66" x 13.27" x 13.82"                                                                                                                       | 474 x 337 x 351 mm / 18.66" x 13.27" x 13.82"                                                                                                                                                                                                             |
| Weight                              | 18 kg / 39.68 lbs                                                                                                                                                   | 18 kg / 39.68 lbs                                                                                                                                                                                                                                         |
| Suitable guns                       | A 12, A 12-FL (welding cable not possible to extend)                                                                                                                | A 12, A 12-FL (welding cable not possible to extend)                                                                                                                                                                                                      |

Order No.

**93-60-0650** (Plug E+F; Europe + China),  
**93-66-0650** (Plug B; USA, Canada + China)

**93-40-020** (Ground cable, 5 m, 25 mm<sup>2</sup>,  
2 vice grips 10")

**88-24-466** (Toolbag)  
(accessories and welding gun not included)

Order No.

**93-60-0652** (plug E+F; Europe + China, available  
from 2018)

**93-40-020** (Ground cable, 5 m, 25 mm<sup>2</sup>,  
2 vice grips 10")

**88-24-466** (Toolbag)  
(accessories and welding gun not included)

Legend

Welding process: ARC = Drawn arc stud welding, SC = Short cycle stud welding



Mild steel Stainless steel Aluminium

### IT 1002



- All-rounder for construction sites and workshops (IP 23)
- Precise results through advanced inverter technology

M3 to M16 (type RD)  
#4 to 5/8" (type RD)




### IT 2002



- Energy Package for larger studs, used on construction sites and workshops

M3 to M24  
#4 to 1"




### IT 90



- Inverter (2000 A) with options for 4 outputs, process monitoring and shielding gas

M3 to M24  
#4 to 1"



|                                  |                                                                                             |                                                                                             |                                                                        |
|----------------------------------|---------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|------------------------------------------------------------------------|
| Welding process                  | ARC, SC                                                                                     | ARC, SC                                                                                     | ARC, SC                                                                |
| Welding material                 |                                                                                             |                                                                                             |                                                                        |
| Technology                       | Inverter                                                                                    | Inverter                                                                                    | Inverter                                                               |
| Equipment                        |                                                                                             |                                                                                             |                                                                        |
| Welding with ceramic ferrule     | X                                                                                           | X                                                                                           | X                                                                      |
| Welding with shielding gas       | X                                                                                           | X                                                                                           | X                                                                      |
| Process control                  | (optional)                                                                                  | --                                                                                          | X                                                                      |
| Automation                       | (optional)                                                                                  | --                                                                                          | X                                                                      |
| 4 gun/head connections           | --                                                                                          | --                                                                                          | (optional)                                                             |
| Display                          | Digital                                                                                     | Digital                                                                                     | Digital                                                                |
| Welding range                    | M3 to M16 (type RD), dia. 2 to 14 mm /<br>#4 to 5/8" (type RD), dia. 14 ga to 9/16"         | M3 to M24, dia. 2 to 22 mm /<br>#4 to 1", dia. 14 ga to 1"                                  | M3 to M24, dia. 2 to 22 mm /<br>#4 to 1", dia. 14 ga to 7/8"           |
| Welding rate                     | M12 / 1/2" = 25 studs/min                                                                   | Dia. 22 / 7/8" = 6 studs/min                                                                | Dia. 22 / 7/8" = 6 studs/min                                           |
| Welding current                  | 1000 A (max.)                                                                               | 2000 A (max.)                                                                               | 2000 A (max.)                                                          |
| Current adjustment range         | 100 to 1000 A, electrode 50 to 400 A (stepless)                                             | 300 to 2000 A (stepless)                                                                    | 300 to 2000 A (stepless)                                               |
| Welding time                     | 5 to 1000 ms (stepless)                                                                     | 5 to 1500 ms (stepless)                                                                     | 5 to 1500 ms (stepless)                                                |
| Primary power                    | 400 V*, 3 phases, 50/60 Hz, 35 AT (slow blow)<br>*alternative primary power see „Order No.“ | 400 V*, 3 phases, 50/60 Hz, 63 AT (slow blow)<br>*alternative primary power see „Order No.“ | 400 V, 3 phases, 50/60 Hz, 63 AT (slow blow)                           |
| Primary plug                     | 32 A (with 400 V mains)                                                                     | 63 A (with 400 V mains)                                                                     | 63 A (with 400 V mains)                                                |
| Connected load                   | 50 kVA (with 400 V mains)                                                                   | 100 kVA (with 400 V mains)                                                                  | 100 kVA (with 400 V mains)                                             |
| Cooling type                     | F (temperature controlled cooling fan)                                                      | F (temperature controlled cooling fan)                                                      | F (temperature controlled cooling fan)                                 |
| IP Code                          | IP 23                                                                                       | IP 23                                                                                       | IP 21                                                                  |
| Dimension LxWxH (without handle) | 660 x 280 x 340 mm /<br>26" x 11" x 13.4"                                                   | 600 x 500 x 830 mm /<br>23.6" x 19.7" x 32.7"                                               | 650 x 560 x 1290 mm /<br>25.6" x 22" x 50.8"                           |
| Weight                           | 31 kg / 68.343 lbs                                                                          | 95 kg / 209.4 lbs                                                                           | 145 kg / 319.67 lbs (1 gun conn.)<br>165 kg / 363.76 lbs (4 gun conn.) |
| Suitable guns                    | A 12, A 12-FL, A 16, CA 08                                                                  | A 12, A 12-FL, A 16, A 22                                                                   | A 12, A 12-FL, A 16, A 22                                              |

#### Order No.

93-60-1202 (400 V)  
93-66-1202 (480/460 V)

#### Order No.

93-60-2202 (Gas, 400 V)  
93-66-2202 (Gas, 480/460 V)

#### Order No.

93-60-12096 (400 V - 1 gun connection)  
93-60-42096 (400 V - 4 gun connection)

93-40-020 (Ground cable, 5 m, 25 mm², 2 vice grips 10")

93-40-019 (Ground cable for welding elements to M20, 2 pcs., 5 m, 70 mm², 1 vice grip 10")

93-40-072 (Ground cable for welding elements to M22, 2 pcs., 5 m, 70 mm², 1 vice grip 10")

93-40-019 (Ground cable for welding elements to M20, 2 pcs., 5 m, 70 mm², 1 vice grip 10")

93-40-072 (Ground cable for welding elements to M22, 2 pcs., 5 m, 70 mm², 1 vice grip 10")

#### Legend

Welding process: ARC = Drawn arc stud welding, SC = Short cycle stud welding

Mild steel Stainless steel Aluminium

# Transformer series

## Systems for drawn arc



### ARC 800



- Robust transformer for workshops and construction sites (IP 23)
- Automation (optional)

M3 to M12 (type RD)  
#4 to 1/2" (type RD)



|                                  |                                                                                                                                                                     |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Welding process                  | ARC, SC                                                                                                                                                             |
| Welding material                 |   |
| Technology                       | Transformer                                                                                                                                                         |
| Equipment                        |                                                                                                                                                                     |
| Welding with ceramic ferrule     | X                                                                                                                                                                   |
| Welding with shielding gas       | X                                                                                                                                                                   |
| Automation                       | X (optional)                                                                                                                                                        |
| Display                          | Digital                                                                                                                                                             |
| Welding range                    | M3 to M12 (type RD), dia. 2 to 10 mm /<br>#4 to 1/2" (type RD), dia. 14 ga to 3/8"                                                                                  |
| Welding rate                     | 7 to 17 studs/min (depending on application and stud dia.)                                                                                                          |
| Welding current                  | 800 A                                                                                                                                                               |
| Current adjustment range         | --                                                                                                                                                                  |
| Welding time                     | 5 to 1000 ms (stepless)                                                                                                                                             |
| Primary power                    | 400 V*, 3 phases, 50/60 Hz, 35 AT (slow blow)<br>*alternative primary power see „Order No.“                                                                         |
| Primary plug                     | 32 A (at 400 V mains)                                                                                                                                               |
| Connected load                   | $I_{max} = 31 A$                                                                                                                                                    |
| Cooling type                     | F (temperature controlled cooling fan)                                                                                                                              |
| IP Code                          | IP 23                                                                                                                                                               |
| Dimension LxWxH (without handle) | 470 x 230 x 220 mm / 18.50" x 9.06" x 8.66"                                                                                                                         |
| Weight                           | 40 kg / 88.185 lbs                                                                                                                                                  |
| Suitable guns                    | A 12, A 12-FL, A 16, CA 08                                                                                                                                          |

#### Order No.

93-10-0702A (400 V)  
93-16-0702A (230/460 V)  
93-15-0702A (575 V)

93-40-020 (Ground cable,  
5 m, 25 mm<sup>2</sup>, 2 vice grips 10")



#### Legend

Welding process: ARC = Drawn arc stud welding, SC = Short cycle stud welding

 Mild steel  Stainless steel

## ARC 800

### Simple operation



#### Two-button operation

Fast set-up with intuitive operation helps to get started.

### High cycle sequence



#### Cooling channel

High cycle sequence through optimum cooling of the electrical components.

# Overview Ceramic Application

## Drawn arc stud welding



| Suitable for                                                                                          |                               |  |  |                              |                                 |
|-------------------------------------------------------------------------------------------------------|-------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|---------------------------------|
| Stud type                                                                                             | Stud diameter                 | Order No.                                                                         | Order No.                                                                         | $\varnothing$<br><br>Diameter | Included in accessories:        |
| <b>RD</b><br>        | M6                            | 83-50-006                                                                         | 80-31-095                                                                         | $\varnothing = 22 \text{ mm}$                                                                                   | 93-41-012, 93-41-016            |
|                                                                                                       | M8                            | 83-50-008                                                                         | 80-31-120                                                                         | $\varnothing = 22 \text{ mm}$                                                                                   | 93-41-012, 93-41-016            |
|                                                                                                       | M10                           | 83-50-010                                                                         | 80-31-150                                                                         | $\varnothing = 22 \text{ mm}$                                                                                   | 93-41-012, 93-41-016            |
|                                                                                                       | M12                           | 83-50-012                                                                         | 80-31-170                                                                         | $\varnothing = 22 \text{ mm}$                                                                                   | 93-41-012, 93-41-016, 93-40-082 |
|                                                                                                       | M16                           | 83-50-016                                                                         | 80-30-116                                                                         | $\varnothing = 28 \text{ mm}$                                                                                   | 93-41-016, 93-40-086            |
|                                                                                                       | M20                           | 83-50-020                                                                         | 80-31-262                                                                         | $\varnothing = 28 \text{ mm}$                                                                                   | 93-40-042                       |
| <b>MD (DD)</b><br> | M6                            | 83-50-006                                                                         | 80-31-095                                                                         | $\varnothing = 22 \text{ mm}$                                                                                   | 93-41-012, 93-41-016            |
|                                                                                                       | M8                            | 83-50-008                                                                         | 80-31-150                                                                         | $\varnothing = 22 \text{ mm}$                                                                                   | 93-41-012, 93-41-016            |
|                                                                                                       | M10                           | 83-50-010                                                                         | 80-31-150                                                                         | $\varnothing = 22 \text{ mm}$                                                                                   | 93-41-012, 93-41-016            |
|                                                                                                       | M12                           | 83-50-012                                                                         | 80-31-205                                                                         | $\varnothing = 22 \text{ mm}$                                                                                   | 93-41-012, 93-41-016, 93-40-082 |
|                                                                                                       | M16                           | 83-50-016                                                                         | 80-31-262                                                                         | $\varnothing = 28 \text{ mm}$                                                                                   | 93-41-016, 93-40-081            |
| <b>PD</b><br>      | M6                            | 83-50-006                                                                         | 80-31-095                                                                         | $\varnothing = 22 \text{ mm}$                                                                                   | 93-41-012, 93-41-016            |
|                                                                                                       | M8                            | 83-50-008                                                                         | 80-31-120                                                                         | $\varnothing = 22 \text{ mm}$                                                                                   | 93-41-012, 93-41-016            |
|                                                                                                       | M10                           | 83-50-010                                                                         | 80-31-150                                                                         | $\varnothing = 22 \text{ mm}$                                                                                   | 93-41-012, 93-41-016            |
|                                                                                                       | M12                           | 83-50-012                                                                         | 80-31-170                                                                         | $\varnothing = 22 \text{ mm}$                                                                                   | 93-41-012, 93-41-016, 93-40-082 |
|                                                                                                       | M16                           | 83-50-016                                                                         | 80-30-116                                                                         | $\varnothing = 28 \text{ mm}$                                                                                   | 93-41-016, 93-40-086            |
|                                                                                                       | M20                           | 83-50-020                                                                         | 80-31-262                                                                         | $\varnothing = 28 \text{ mm}$                                                                                   | 93-40-042                       |
| <b>UD</b><br>      | 4 mm*                         | 83-50-004                                                                         | 80-30-104*                                                                        | $\varnothing = 22 \text{ mm}$                                                                                   |                                 |
|                                                                                                       | 5 mm*                         | 83-50-005                                                                         | 80-30-105*                                                                        | $\varnothing = 22 \text{ mm}$                                                                                   |                                 |
|                                                                                                       | 6 mm                          | 83-50-006                                                                         | 80-31-095                                                                         | $\varnothing = 22 \text{ mm}$                                                                                   | 93-41-012, 93-41-016            |
|                                                                                                       | 8 mm                          | 83-50-008                                                                         | 80-31-150                                                                         | $\varnothing = 22 \text{ mm}$                                                                                   | 93-41-012, 93-41-016            |
|                                                                                                       | 10 mm                         | 83-50-010                                                                         | 80-31-150                                                                         | $\varnothing = 22 \text{ mm}$                                                                                   | 93-41-012, 93-41-016            |
|                                                                                                       | 12 mm                         | 83-50-012                                                                         | 80-31-205                                                                         | $\varnothing = 22 \text{ mm}$                                                                                   | 93-41-012, 93-41-016, 93-40-082 |
|                                                                                                       | 16 mm                         | 83-50-016                                                                         | 80-31-262                                                                         | $\varnothing = 28 \text{ mm}$                                                                                   | 93-41-016, 93-40-081            |
| <b>ID</b><br>      | $\varnothing 10 / \text{M6}$  | 83-50-010                                                                         | 80-31-150                                                                         | $\varnothing = 22 \text{ mm}$                                                                                   | 93-41-012, 93-41-016            |
|                                                                                                       | $\varnothing 12 / \text{M8}$  | 83-50-012                                                                         | 80-31-205                                                                         | $\varnothing = 22 \text{ mm}$                                                                                   | 93-41-012, 93-41-016, 93-40-082 |
|                                                                                                       | $\varnothing 16 / \text{M10}$ | 83-50-016                                                                         | 80-31-262                                                                         | $\varnothing = 28 \text{ mm}$                                                                                   | 93-41-016                       |

\* Ceramic ferrule not standardised




# Systems for **manual** applications - **ARC/SC**

Contact our Distributor Stud Welding Products, Inc. for equipment, repairs, weld studs and accessories 800-252-1919 [sales@studweldprod.com](mailto:sales@studweldprod.com)

# Overview Ceramic Application

## Drawn arc stud welding



| Suitable for                                                                                   |                              | <br>Chuck | <br>Ceramic ferrule grip |                                                                                                 |  |
|------------------------------------------------------------------------------------------------|------------------------------|--------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Stud type                                                                                      | Stud diameter                | Order No.                                                                                  | Order No.                                                                                                  | <br>Diameter | Included in accessories:                                                            |
| <b>SD</b><br> | 6 mm / 1/4"                  | 83-53-006                                                                                  | 80-30-206                                                                                                  | D = 22 mm                                                                                       |                                                                                     |
|                                                                                                | 10 mm / 3/8"                 | 83-53-010                                                                                  | 80-30-210                                                                                                  | D = 22 mm                                                                                       |                                                                                     |
|                                                                                                | 13 mm / 1/2"                 | 83-53-012                                                                                  | 80-31-213                                                                                                  | D = 22 mm                                                                                       |                                                                                     |
|                                                                                                | 13 mm / 1/2"                 | 83-53-012                                                                                  | 80-30-213                                                                                                  | D = 28 mm                                                                                       | 93-40-008                                                                           |
|                                                                                                | 16 mm / 5/8"<br>19 mm / 5/8" | 83-53-019                                                                                  | 80-30-219                                                                                                  | D = 29 mm                                                                                       | 93-40-010                                                                           |
|                                                                                                | 22 mm / 7/8"                 | 83-53-022                                                                                  | 80-30-222                                                                                                  | D = 29 mm                                                                                       | 93-40-011                                                                           |



# Systems for **manual** applications - **ARC/SC**

Contact our Distributor Stud Welding Products, Inc. for equipment, repairs, weld studs and accessories 800-252-1919 [sales@studweldprod.com](mailto:sales@studweldprod.com)

# ARC Stud welding guns

## Systems for drawn arc






### CA 08

### A 12

### A 12

### A 12-FL



- Entry-level version used for SC welding without length compensation

- Small gun with easy set-up for SC welding
- Length compensation (stable welding results)

- Compact gun with easy set-up
- Length compensation (stable welding results)

- Simple set-up of the gun without length compensation

M3 to M8 (M10)  
#4 to 5/16" (7/16")

M3 to M8 (M10)  
#4 to 5/16" (7/16")

M3 to M12  
#4 to 1/2"

Dia. 3 to 12 mm  
#4 to 1/2"

|                                        |                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                            |                                                                                                                                                                           |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Suitable stud welding unit</b>      | ARC 800, Visar 650, IT 1002                                                                                                                                                                                                                              | ARC 800, Visar 650, IT 1002, IT 2002, IT 90                                                                                                                                                                                                              | ARC 800, Visar 650, IT 1002, IT 2002, IT 90                                                                                                                                                                                                                | ARC 800, Visar 650, IT 1002, IT 2002, IT 90                                                                                                                               |
| <b>Welding process</b>                 | SC                                                                                                                                                                                                                                                       | SC                                                                                                                                                                                                                                                       | ARC (ceramic, gas), SC                                                                                                                                                                                                                                     | ARC (ceramic, gas)                                                                                                                                                        |
| <b>Stud material</b>                   |    |    |    |   |
| <b>Welding range</b>                   | M3 to M8 (M10 with special equipment), dia. 2 to 8 mm / #4 to 5/16" (7/16" with special equipment), dia. 14 ga to 5/16"                                                                                                                                  | M3 to M8 (M10 with special equipment), dia. 2 to 8 mm / #4 to 5/16" (7/16" with special equipment), dia. 14 ga to 5/16"                                                                                                                                  | M3 to M12 / dia. 2 to 12 mm / #4 to 1/2", dia. 14 ga to 1/2"                                                                                                                                                                                               | M3 to M12 / dia. 2 to 12 mm / #4 to 1/2", dia. 14 ga to 1/2"<br>ARC ISO pins dia. 3 to 6 mm / dia. #4 to 1/4"                                                             |
| <b>Stud length</b>                     | 6 to 40 mm / 0.24" to 1.57", (longer studs with optional accessories)                                                                                                                                                                                    | 6 to 40 mm / 0.24" to 1.57", (longer studs with optional accessories)                                                                                                                                                                                    | 10 to 400 mm / 0.39" to 15.74" (depending on leg assembly)                                                                                                                                                                                                 | 10 to 400 mm / 0.39" to 15.74" (depending on leg assembly)                                                                                                                |
| <b>Stud type</b>                       | Any type or shape (special chucks if required)                                                                                                                                                                                                           | Any type or shape (special chucks if required)                                                                                                                                                                                                           | Any type or shape (special chucks if required)                                                                                                                                                                                                             | ARC insulation pin, ARC fiberfix pin, ARC threaded stud, ARC pin                                                                                                          |
| <b>Length compensation</b>             | --                                                                                                                                                                                                                                                       | 3 mm / 0.12" automatic                                                                                                                                                                                                                                   | 3 mm / 0.12" automatic                                                                                                                                                                                                                                     | --                                                                                                                                                                        |
| <b>Lift</b>                            | Adjustment range 4.5 mm / 0.18", lockable                                                                                                                                                                                                                | Adjustment range 3 mm / 0.12", lockable                                                                                                                                                                                                                  | Adjustment range 3 mm / 0.12", lockable                                                                                                                                                                                                                    | Fixed 6 mm / 0.24"                                                                                                                                                        |
| <b>Spring force</b>                    | Adjustable, arresting                                                                                                                                                                                                                                    | Adjustable, arresting                                                                                                                                                                                                                                    | Adjustable, arresting                                                                                                                                                                                                                                      | Fixed                                                                                                                                                                     |
| <b>Welding cable</b>                   | 3 m / 9.84'; 25 mm <sup>2</sup> , SK 50                                                                                                                                                                                                                  | 4.8 m / 15.75'; 35 mm <sup>2</sup> , SK 50                                                                                                                                                                                                               | 4.8 m / 15.75'; 35 mm <sup>2</sup> , SK 50                                                                                                                                                                                                                 | 5 or 10 m / 16.40' or 32.81'; 35 mm <sup>2</sup> , SK 50                                                                                                                  |
| <b>IP Code</b>                         | IP 20                                                                                                                                                                                                                                                    | IP 20                                                                                                                                                                                                                                                    | IP 20                                                                                                                                                                                                                                                      | IP 20                                                                                                                                                                     |
| <b>Workplace noise level</b>           | Up to 90 dB (A) may occur during welding                                                                                                                                                                                                                 | Up to 90 dB (A) may occur during welding                                                                                                                                                                                                                 | Up to 90 dB (A) may occur during welding                                                                                                                                                                                                                   | Up to 90 dB (A) may occur during welding                                                                                                                                  |
| <b>Dimension LxWxH (without cable)</b> | 190 x 40 x 140 mm / 7.48" x 1.57" x 5.51"                                                                                                                                                                                                                | 190 x 40 x 140 mm / 7.48" x 1.57" x 5.51"                                                                                                                                                                                                                | 200 x 65 x 140 mm / 7.87" x 2.56" x 5.51"                                                                                                                                                                                                                  | 200 x 65 x 140 mm / 7.87" x 2.56" x 5.51"                                                                                                                                 |
| <b>Weight (without cable)</b>          | 0.7 kg / 1.54 lbs                                                                                                                                                                                                                                        | 0.8 kg / 1.76 lbs                                                                                                                                                                                                                                        | 0.8 kg / 1.76 lbs                                                                                                                                                                                                                                          | 0.8 kg / 1.76 lbs                                                                                                                                                         |

#### Order No.

- <sup>1)</sup> 92-20-281 (PPR-2/SC)  
<sup>2)</sup> 92-20-283 (PSS-1/SC)

92-40-018 (Accessories CD M3 to M8)

#### Order No.

- <sup>3)</sup> 93-20-276 (PPR-2/SC)  
<sup>4)</sup> 93-20-277 (PSS-1/SC)

92-40-018 (Accessories CD M3 to M8)

#### Order No.

- <sup>5)</sup> 93-20-274 (Gas)  
<sup>6)</sup> 93-20-275 (Keramik)

93-40-114 (Accessories for shielding gas; M6 to M12)  
93-41-012 (Accessories for ceramic; M6 to M12)

#### Order No.

- <sup>7)</sup> 93-20-260 (excluding leg assembly, 5 m cable length)

93-40-022 (leg assembly ceramic)  
93-40-021 (leg assembly shielding gas)

<sup>8)</sup> 93-20-26010 (excluding leg assembly, 10 m cable length)  
93-40-066 (leg assembly PSI-3, from l = 75 mm up to l = 280 mm)

#### Legend

Welding process: ARC = Drawn arc stud welding, SC = Short cycle stud welding


 Mild steel  Stainless steel  Aluminium \*) \*) only with shielding gas

## A 12-FL (Art-No. 93-20-260, excl. leg assembly)

Simple set-up of lift and protrusion by adjusting the leg assembly without length compensation

### Including ARC-Adaptor

for use of ARC ceramic and ARC shielding gas chucks

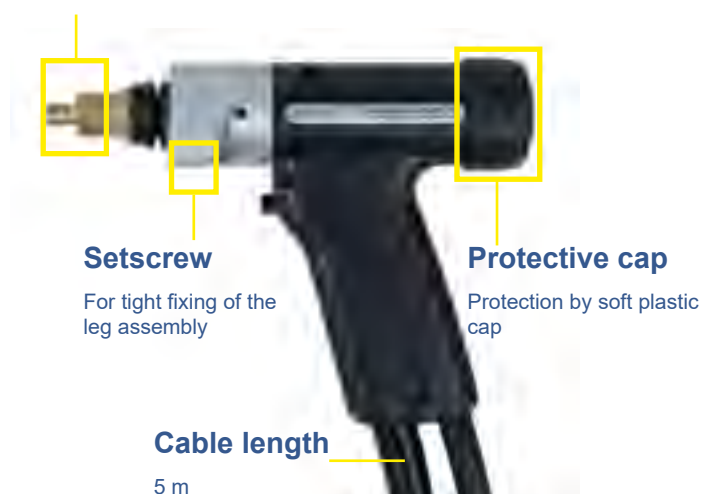

### Applications

Welding with ceramic ferrule



Welding with shielding gas




## A 12-FL ISO (Art-No. 93-20-26010, excl. leg assembly)

Simple set-up of lift and protrusion by adjusting the leg assembly without length compensation

### Excluding ARC-Adaptor

for use of ISO chucks

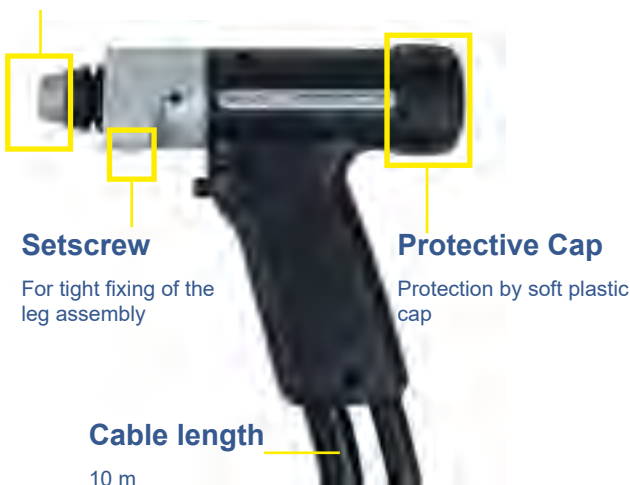

### Application

Welding of ARC ISO pins



# ARC Stud welding guns

## Systems for drawn arc



### A 16

### A 22





- All-rounder for construction sites
- Now with new leg guidance
- Robust gun with plunge damper and length compensation

- Heavy duty gun for construction sites
- Now with new leg guidance
- Robust gun with plunge damper and length compensation

Dia. 3 to 16 mm  
#4 to 5/8"

Dia. 14 to 22 mm (25 mm)  
dia. 9/16" to 7/8" (1")



|                                                     |                                                                                                                                                                       |                                                                                                                                                                          |
|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Suitable stud welding unit                          | ARC 800, IT 1002, IT 2002, IT 90                                                                                                                                      | IT 2002, IT 90                                                                                                                                                           |
| Welding process                                     | ARC (ceramic, gas), SC                                                                                                                                                | ARC (ceramic)                                                                                                                                                            |
| Stud material                                       |   |   |
| Welding range                                       | Dia. 3 to 16 mm / #4 to 5/8"                                                                                                                                          | Dia. 16 to 22 mm (dia. 25 mm) /<br>dia. 5/8" to 7/8" (dia. 1")                                                                                                           |
| Stud length                                         | 10 to 240 mm / 0.39" - 9.45"<br>(depending on leg assembly)                                                                                                           | 20 to 300 mm / 0.79" - 11.81"<br>(depending on leg assembly)                                                                                                             |
| Stud type                                           | Any type or shape (special chucks if required)                                                                                                                        | Any type or shape (special chucks if required)                                                                                                                           |
| Length compensation                                 | 6 mm / 0.24" automatic                                                                                                                                                | 9 mm / 0.35" automatic                                                                                                                                                   |
| Lift                                                | Adjustment range 4 mm / 0.16",<br>(0.25 mm / 0.01" steps, arresting)                                                                                                  | Adjustment range 6 mm / 0.24",<br>(0.25 mm / 0.01" steps, arresting)                                                                                                     |
| Spring force                                        | Oildamper                                                                                                                                                             | Adjustable oildamper                                                                                                                                                     |
| Welding cable                                       | 4.8 m / 15.75'; 50 mm <sup>2</sup> / 1/0, SK 50                                                                                                                       | 4.8 m / 15.75'; 95 mm <sup>2</sup> / 3/0, SKK 95                                                                                                                         |
| IP Code                                             | IP 20                                                                                                                                                                 | IP 20                                                                                                                                                                    |
| Workplace noise level                               | Up to 90 dB (A) may occur during welding                                                                                                                              | Up to 90 dB (A) may occur during welding                                                                                                                                 |
| Dimension LxWxH (without cable,<br>with foot piece) | 260 x 74 x 220 mm / 10.24" x 2.91" x 8.66"                                                                                                                            | 260 x 74 x 220 mm / 10.24" x 2.91" x 8.66"                                                                                                                               |
| Weight (without cable)                              | 2 kg / 4.41 lbs                                                                                                                                                       | 2 kg / 4.41 lbs                                                                                                                                                          |

#### Order No.

**93-20-280C** (excluding leg assembly)

#### Ceramic

Accessories and leg assemblies for ceramic  
see page 42 to 45

#### Shielding gas

**93-40-084**

(Accessories for shielding gas; M12)

**93-40-017**

(Shielding gas leg assembly)

#### Order No.

**93-20-290C** (excluding leg assembly)

**93-21-290C** (US version, excluding leg assembly)

#### Ceramic

Accessories and leg assemblies for ceramic  
see page 42 to 45



#### Legend

Welding process: ARC = Drawn arc stud welding, SC = Short cycle stud welding

 Mild steel  Stainless steel

### A 16 (Art-No. 93-20-280C, excl. leg assembly)

New unique leg assembly clamping, no tools needed

100 % of test customers were impressed

#### Level

On rear of gun to  
line studs level



#### Tool-free clamping

Simply tighten by hand  
and thus achieve an  
excellent holding force

Cable length

4.8 m

#### Applications

Welding of studs / shear connectors  
with ceramic ferrule



Welding with shielding gas




### A 22 (Art.-No. 93-20-290C, excl. leg assembly)

New unique leg assembly clamping, no tools needed

100 % of test customers were impressed

#### Level

On rear of gun to  
line studs level

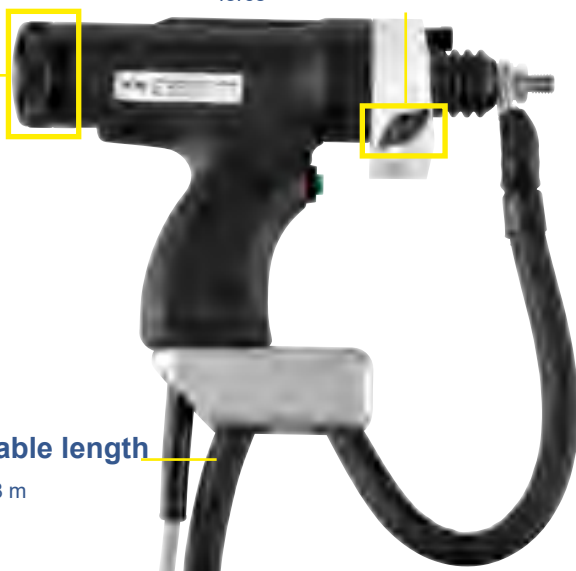

#### Tool-free clamping

Simply tighten by hand and thus  
achieve an excellent holding  
force

Cable length

4.8 m

#### Applications

Welding of studs / shear connectors  
with ceramic ferrule



## ARC 800

| ARC 800 with A 12 (Gas)                                                            | Order No.: ARC800AG+ includes:                                        |
|------------------------------------------------------------------------------------|-----------------------------------------------------------------------|
|   | ARC 800 (Gas version) 400 V<br>Order No. 93-10-0702A                  |
|   | A 12 with shielding gas leg assembly PSS-2<br>Order No. 93-20-274     |
|   | Protective hose for A 12 / A 12-FL (5 m cable)<br>Order No. 80-11-430 |
|   | Ground cable<br>Order No. 93-40-020                                   |
|  | Gun accessories ARC Gas 6 mm to 12 mm<br>Order No. 93-40-114          |

| ARC 800 with A 12 (Ceramic)                                                         | Order No.: ARC800AK+ includes:                                        |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------|
|    | ARC 800 (Gas version) 400 V<br>Order No. 93-10-0702A                  |
|   | A 12 with ceramic leg assembly PSC-1<br>Order No. 93-20-275           |
|    | Protective hose for A 12 / A 12-FL (5 m cable)<br>Order No. 80-11-430 |
|   | Ground cable<br>Order No. 93-40-020                                   |
|  | Gun accessories ARC Ceramic 6 mm to 12 mm<br>Order No. 93-41-012      |

## IT 1002

| IT 1002 with A12 (Gas)                                                              | Order No.: IT1002A12G+ includes:                                      |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------|
|  | IT 1002 / Gas version 400 V<br>Order No. 93-60-1202                   |
|  | A 12 with shielding gas leg assembly PSS-2<br>Order No. 93-20-274     |
|  | Protective hose for A 12 / A 12-FL (5 m cable)<br>Order No. 80-11-430 |
|  | Ground cable<br>Order No. 93-40-020                                   |
|  | Gun accessories ARC Gas 6 to 12 mm<br>Order No. 93-40-114             |

| IT 1002 with A 12 (Ceramic)                                                          | Order No.: IT1002A12K+ includes:                                      |
|--------------------------------------------------------------------------------------|-----------------------------------------------------------------------|
|   | IT 1002 / Gas version 400 V<br>Order No. 93-60-1202                   |
|  | A 12 with ceramic leg assembly PSC-1<br>Order No. 93-20-275           |
|   | Protective hose for A 12 / A 12-FL (5 m cable)<br>Order No. 80-11-430 |
|  | Ground cable<br>Order No. 93-40-020                                   |
|  | Gun accessories ARC Ceramic 6 mm to 12 mm<br>Order No. 93-41-012      |

## Visar 650

| Visar 650 with A 12 (Gas)                                                           | Available in 2018<br>Order No.: VISAR650AG+<br>includes:                 |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------|
|    | Visar 650 (Gas version)<br>Order No. 93-60-0652                          |
|    | A 12 with shielding gas<br>leg assembly PSS-2<br>Order No. 93-20-274     |
|    | Protective hose for A 12 /<br>A 12-FL (5 m cable)<br>Order No. 80-11-430 |
|    | Ground cable<br>Order No. 93-40-020                                      |
|   | Toolbag<br>Order No. 88-24-466                                           |
|  | Gun accessories ARC<br>Gas 6 mm to 10 mm<br>Order No. 93-40-128          |

| Visar 650 with A 12 (Ceramic)                                                        | Order No.: VISAR650AK+<br>includes:                                      |
|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------|
|     | Visar 650 (without shielding<br>gas connection)<br>Order No. 93-60-0650  |
|    | A 12 with ceramic leg<br>assembly PSC-1<br>Order No. 93-20-275           |
|     | Protective hose for A 12 /<br>A 12-FL (5 m cable)<br>Order No. 80-11-430 |
|    | Ground cable<br>Order No. 93-40-020                                      |
|   | Toolbag<br>Order No. 88-24-466                                           |
|  | Gun accessories ARC<br>Ceramic 6 mm to 10 mm<br>Order No. 93-41-010      |

## IT 2002

(Please order the gun accessories separately)

| IT 2002<br>with A 22                                                                | Order No.: IT2002A22GK<br>includes:                                            |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
|  | IT 2002 400 V<br>Order No. 93-60-2202                                          |
|  | A 22<br>Order No. 93-20-290C                                                   |
|  | 2 Ground cables<br>Order No. 93-40-019                                         |
|  | Ceramic leg assembly PSC-2,<br>leg 10 x 240 mm, d=29 mm<br>Order No. 93-40-041 |

## MARC

### Innovative ARC welding technique

HBS presents MARC, a manual nut welding system which is more and more replacing traditional processes all over the world due to the innovative procedure with a magnetic rotating ARC.

Regardless of whether only static stability is required or if additional, customerspecific connection properties (e.g., pressure tight) need to be fulfilled, you always achieve the best results – with considerable time and cost savings.

Spatter free joints can be achieved with a high welding cycle time of up to 10 welds/minute. This is especially suited for thin metal sheets from 1 mm upwards.

MARC provides the access to a new future to international trusts, medium-sized companies as well as to crafts enterprise.



Joining of  
welding elements



A burning arc is put into rotation in a controlled way. A ringshaped weld pool is generated where the welding element is plunged in.



The very precise and clean welding process does not require any subsequent machining of the workpiece or welding element (e.g. caused by distortion or welding spatters at the thread).



The molten areas solidify. The short and clean welding process does not require any machining.


Based on a very short welding time and low energy consumption, extraordinary welding results are achieved featured by high process stability and best economical efficiency.

**Optimum results, efficiency and a convincing price/performance ratio provide advantages with view to competition.**



## MARC

**Best Solution  
for Best Results**

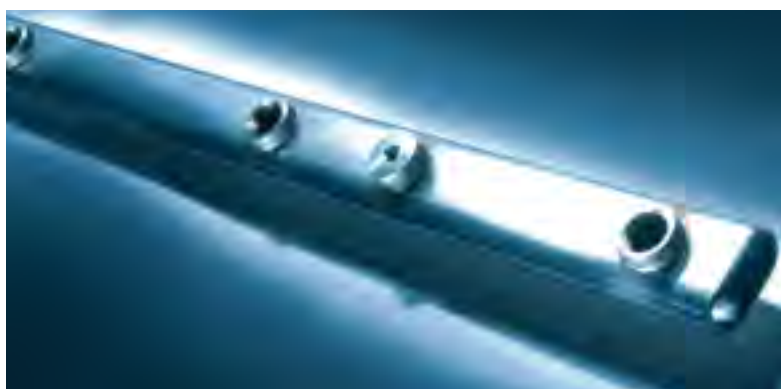

Welding of pads and nuts on punched and unpunched metal sheets.

Applications are e.g. sprinkler systems, ventilation tubes, hinges, pressure vessels, exhaust systems.

# MARC series

Nut welding systems for welding  
with magnetic rotating arc



## MARC 1 A



Nut welding gun  
AM 12 A

Welding unit  
IT 1002

- For welding of welding nuts of type Hex<sup>Nut</sup>
- For welding on perforated and unperforated metal sheets
- Especially suitable for workshop and assembly area
- Up to 4 welding nuts/min

Hex<sup>Nut</sup>  
M6 to M12



AM 12 A



|                            |                                                                                                 |
|----------------------------|-------------------------------------------------------------------------------------------------|
| Suitable stud welding unit | IT 1002 (see page 39)                                                                           |
| Welding process            | Magnetic rotating arc                                                                           |
| Welding range              | Welding nuts of type Hex <sup>Nut</sup> M6 to M12                                               |
| Wall thickness             | 1 to 3 mm / 0.04" to 0.12" (other sheet thicknesses on request)                                 |
| Welding element material   | A2-50                                                                                           |
| Welding element type       | MARC welding nut - type Hex <sup>Nut</sup>                                                      |
| Welding rate               | Up to 4 welding nuts/min.<br>The maximum welding sequence is limited by a number of parameters. |
| Length compensation        | 3 mm / 0.12", automatic                                                                         |
| Lift                       | Adjustment range 3 mm / 0.12", lockable                                                         |
| Spring pressure            | Adjustable, arresting                                                                           |
| Welding cable              | 5 m / 16.40'                                                                                    |
| IP Code                    | IP 20                                                                                           |
| Workplace noise level      | Up to 90 dB (A) may occur during welding                                                        |
| Dimension LxWxH            | 320 x 70 x 200 mm / 12.60" x 2.76" x 7.87" (without cable, with leg assembly)                   |
| Weight                     | 0.9 kg / 1.98 lbs (without cable)                                                               |

### Order No.

**93-20-242** (Welding gun AM 12 A)  
**93-60-1202** (Welding unit IT 1002)  
**93-40-020** (Ground cable, 5 m, 25 mm<sup>2</sup>, 2 vice grips 10")

Complete equipment for AM 12 A:

**93-40-0030068** for Hex<sup>Nut</sup> M6  
**93-40-003008** for Hex<sup>Nut</sup> M8  
**93-40-003010** for Hex<sup>Nut</sup> M10  
**93-40-003012** for Hex<sup>Nut</sup> M12

| Dimension of welding element |                                                           |  |  |  |  |
|------------------------------|-----------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                              | Dimension                                                 | M6                                                                                  | M8                                                                                    | M10                                                                                   | M12                                                                                   |
|                              | Height Hex <sup>Nut</sup>                                 | 8                                                                                   | 8                                                                                     | 9                                                                                     | 11                                                                                    |
|                              | Width across flats                                        | AF14                                                                                | AF14                                                                                  | AF17                                                                                  | AF19                                                                                  |
| Bore diameter                | Bore diameter - metal sheet<br>(based on DIN EN ISO 4032) | 10.6 <sup>+0.1...+0.4</sup>                                                         | 10.6 <sup>+0.1...+0.4</sup>                                                           | 12.6 <sup>+0.1...+0.4</sup>                                                           | 14.9 <sup>+0.1...+0.4</sup>                                                           |
| Tightening torque            | Tightening torque in Nm<br>(μ = 0,18)                     | 3.8                                                                                 | 9.5                                                                                   | 19.0                                                                                  | 33.0                                                                                  |

## PC-M3



- The most effective as well as most economical welding procedure for the welding hollow cylindrical parts
- Closed and pressure sealed weld all-over
- For gas tight connections like e.g. at exhaust systems
- Energy controlled welding system

Min. dia. 8 mm, max. dia. 32 mm  
or internal thread M4 to M18



|                                |                                                                                                                                          |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Welding range</b>           | Min. dia. 8 mm, max. dia. 32 mm or internal thread M4 to M18<br>Min. dia. 5/16", max. dia. 1.26 mm or internal thread #8 to 0.71"        |
| <b>Height of nut</b>           | Min. 4 mm, max. 30 mm<br>Min. 0.16", max. 1.18"                                                                                          |
| <b>Welding material</b>        | Weldable, high and low alloys, mild steel                                                                                                |
| <b>Welding rate</b>            | Depending on dia. 12 pieces/min<br>(dia. 28, dia. 1.10" approx. 2 to 4 pieces/min)                                                       |
| <b>Welding current</b>         | 300 to 1000 A stepless remote controllable                                                                                               |
| <b>Welding time</b>            | 5 to 2000 ms stepless remote controllable                                                                                                |
| <b>Primary power</b>           | 400 V (480 V), 16 A                                                                                                                      |
| <b>Gas connection</b>          | Series                                                                                                                                   |
| <b>Air pressure connection</b> | 6 bar/inner hose dia. 6 mm, dia. 1/4"                                                                                                    |
| <b>Power source</b>            | Inverter                                                                                                                                 |
| <b>Controller</b>              | CEL M440, 186 GHz                                                                                                                        |
| <b>Programming modes</b>       | Welding current, welding time, any motion profile, welding piston, shielding gas,<br>fully controlled and tempered magnetic field former |
| <b>Welding head</b>            | Linearmotor driven                                                                                                                       |
| <b>Field former unit</b>       | Tempered                                                                                                                                 |
| <b>Pneumatic work lift</b>     | 120 mm, 4.72"                                                                                                                            |
| <b>Height adjustment</b>       | 250 mm, 9.84"                                                                                                                            |

Order No.

According to project

### Best Solution for Best Results




## Automatically,





## faster, better



| Material                                                                                                          | Diameter  | Catalogue        |
|-------------------------------------------------------------------------------------------------------------------|-----------|------------------|
|                                  | M3 to M10 | Welding elements |
|  <b>Type PT</b><br>Threaded stud |           |                  |

| Material                                                                                                                 | Diameter | Catalogue        |
|--------------------------------------------------------------------------------------------------------------------------|----------|------------------|
|                                         | M4 to M8 | Welding elements |
|  <b>CD Paint clearing threaded stud</b> |          |                  |

| Material                                                                                                    | Diameter | Catalogue        |
|-------------------------------------------------------------------------------------------------------------|----------|------------------|
|                          | 5 mm     | Welding elements |
|  <b>CD Fir tree stud</b> |          |                  |

| Material                                                                                                                    | Diameter    | Catalogue        |
|-----------------------------------------------------------------------------------------------------------------------------|-------------|------------------|
|                                          | 3 to 7.1 mm | Welding elements |
|  <b>Type UT</b><br>Unthreaded stud (pin) |             |                  |

| Material                                                                                                                              | Diameter                       | Catalogue        |
|---------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|------------------|
|                                                    | M3/dia. 5 mm to M5/dia. 7.1 mm | Welding elements |
|  <b>Type IT</b><br>Stud (pin) with internal thread |                                |                  |

| Material                                                                                                                                                                                           | Welding range           | Page |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|------|
|                                                                                                                   | M3 to M8<br>#4 to 5/16" | 69   |
|  <b>CDi 1502 AT</b><br>Entry level automation for semi automatic use.<br>Simple library function for ease of use. |                         |      |

| Material                                                                                                                                                                                                                  | Welding range                         | Page |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|------|
|                                                                                                                                        | M3 to M8 (M10)<br>#4 to 5/16" (7/16") | 69   |
|  <b>CDMi 2402</b><br>All-rounder for automation.<br>Extensive library function.<br>Change over of capacitors for optimal energy input. |                                       |      |

| Material                                                                                                                                                                                                                     | Welding range            | Page |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|------|
|                                                                                                                                           | M3 to M10<br>#4 to 7/16" | 69   |
|  <b>CDMi 3202</b><br>Energy package for automation.<br>Extensive library function.<br>Change over of capacitors for optimal energy input. |                          |      |

|                                                                                                                           |
|---------------------------------------------------------------------------------------------------------------------------|
| <b>Ground cable</b><br>92-40-095<br> |
|---------------------------------------------------------------------------------------------------------------------------|

**VBZ-3**  
Page 64



| Material                                                                                                                                                                                                                                                                           | Welding range           | Page |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|------|
|                                                                                                                                                                                                   | M3 to M8<br>#4 to 5/16" | 65   |
|  <p><b>PAH-1 with foot ring</b><br/><i>Universal design for flat surfaces.</i><br/>Hand gun for fully automatic stud feed (with VBZ-3) or hand feed; recommended for large-scale production.</p> |                         |      |

| Material                                                                                                                                                                                                                                                                                              | Welding range           | Page |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|------|
|                                                                                                                                                                                                                    | M3 to M8<br>#4 to 5/16" | 65   |
|  <p><b>PAH-1 with centering device PZV 3 dia. 30</b><br/><i>Used for welding with templates.</i><br/>Hand gun for fully automatic stud feed (with VBZ-3) or hand feed; recommended for large-scale production.</p> |                         |      |

| Legend                                                                                |                        |
|---------------------------------------------------------------------------------------|------------------------|
| Material                                                                              | Stud-/Welding material |
|  | Mild steel             |
|  | Stainless steel        |
|  | Aluminium              |
|  | Brass                  |

# Configuration

## Capacitor discharge stud welding - Components



| Material | Diameter  | Catalogue        |
|----------|-----------|------------------|
|          | M3 to M10 | Welding elements |



**Type PT**  
Threaded stud

| Material | Diameter | Catalogue        |
|----------|----------|------------------|
|          | M4 to M8 | Welding elements |



CD Paint clearing threaded stud

| Material | Diameter | Catalogue        |
|----------|----------|------------------|
|          | 5 mm     | Welding elements |



CD Fir tree stud

| Material | Diameter    | Catalogue        |
|----------|-------------|------------------|
|          | 3 to 7.1 mm | Welding elements |



**Type UT**  
Unthreaded stud (pin)

| Material | Diameter                       | Catalogue        |
|----------|--------------------------------|------------------|
|          | M3/dia. 5 mm to M5/dia. 7.1 mm | Welding elements |



**Type IT**  
Stud (pin) with internal thread

| Material | Welding range                         | Page |
|----------|---------------------------------------|------|
|          | M3 to M8 (M10)<br>#4 to 5/16" (7/16") | 69   |



**CDMi 2402**  
All-rounder for automation. Extensive library function. Change over of capacitors for optimal energy input.

| Material | Welding range            | Page |
|----------|--------------------------|------|
|          | M3 to M10<br>#4 to 7/16" | 69   |



**CDMi 3202**  
Energy package for automation. Extensive library function. Change over of capacitors for optimal energy input.

**Ground cable**  
92-40-095



**Connecting line**  
Page 77



**VBZ-3**  
Page 64



**Ring initiator and coupling**  
Page 77



**Working stroke with ring initiator**  
Page 77



| Material | Welding range | Page |
|----------|---------------|------|
|----------|---------------|------|



M3 to M8  
#4 to 5/16"

66



**KAH 412**

Setting the lift and plunge via digital display (selection mm/inch).  
No length compensation.



M3 to M8  
#4 to 5/16"

66



**KAH 412 LA**

Setting the lift via adjustment screw (increments 0.1 mm).  
Compensation of length variances in studs height and variances of the workpiece.

**Further accessories**  
Page 76-77



| Legend                                                                                |                        |
|---------------------------------------------------------------------------------------|------------------------|
| Material                                                                              | Stud-/Welding material |
|  | Mild steel             |
|  | Stainless steel        |
|  | Aluminium              |
|  | Brass                  |

# Configuration

## Short cycle – Components



| Material                                                   | Diameter | Catalogue        |
|------------------------------------------------------------|----------|------------------|
|                                                            | M5 to M8 | Welding elements |
| <p><b>Type PS</b><br/>Threaded stud with reduced shaft</p> |          |                  |

| Material                               | Diameter | Catalogue        |
|----------------------------------------|----------|------------------|
|                                        | M6 to M8 | Welding elements |
| <p>SC Paint clearing threaded stud</p> |          |                  |

| Material                | Diameter | Catalogue        |
|-------------------------|----------|------------------|
|                         | 5 mm     | Welding elements |
| <p>SC Fir tree stud</p> |          |                  |

| Material                                        | Diameter  | Catalogue        |
|-------------------------------------------------|-----------|------------------|
|                                                 | 3 to 8 mm | Welding elements |
| <p><b>Type US</b><br/>Unthreaded stud (pin)</p> |           |                  |

| Material                                                  | Diameter                     | Catalogue        |
|-----------------------------------------------------------|------------------------------|------------------|
|                                                           | M3/dia. 5 mm to M6/dia. 8 mm | Welding elements |
| <p><b>Type IS</b><br/>Stud (pin) with internal thread</p> |                              |                  |

| Material                                                                                                                   | Welding range                              | Page |
|----------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|------|
|                                                                                                                            | M3 to M10 (for SC)<br>#4 to 7/16" (for SC) | 71   |
| <p><b>IT 1002</b><br/>All-rounder for workshops (IP 23). Precise welding results through advanced inverter technology.</p> |                                            |      |

| Material                                                                                                                                                                                                                                                                   | Welding range                              | Page |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|------|
|                                                                                                                                                                                                                                                                            | M3 to M10 (for SC)<br>#4 to 7/16" (for SC) | 71   |
| <p><b>IT 90</b><br/>Inverter (2000 A) with options for 4 outputs, process monitoring and shielding gas. Precise results through inverter technology for use with SC on thin sheets and critical surfaces (e.g. galvanised) and drawn arc to stud size of 22 mm (7/8").</p> |                                            |      |

**Welding current sensor**  
Page 77

**Ground cable**  
93-40-020

**Ground cable**  
(2 pcs.)  
93-40-072



| Legend                                                                                |                        |
|---------------------------------------------------------------------------------------|------------------------|
| Material                                                                              | Stud-/Welding material |
|  | Mild steel             |
|  | Stainless steel        |
|  | Aluminium              |
|  | Brass                  |

## VBZ-3



- Fully automatic feeding of welding elements from dia. 3 up to 8 mm (with flange) (other dia. on request)
- Length from 8 to 50 mm
- Simple, fast change over to different welding elements (by means of quick-change system)

M3 to M8  
#4 to 5/16"



|                         |                                                                                     |
|-------------------------|-------------------------------------------------------------------------------------|
| Stud diameter           | M3 to M8, dia. 3 to 8 mm / #4 to 5/16, dia. #4 to 5/16" (other diameter on request) |
| Stud length             | 8 to 50 mm / 0.31" - 1.97"                                                          |
| Feed speed              | Up to 30 studs/min (depending on welding element and feeding tube)                  |
| Air pressure connection | 6 bar/800 litre/min                                                                 |
| Primary power           | 230 V*, 50 Hz, 0,9 A<br>*alternative primary power see „Order No.“                  |
| IP Code                 | IP 20                                                                               |
| Dimension LxWxH         | 470 x 310 x 280 mm / 18.50" x 12.20" x 11.02"                                       |
| Weight                  | Approx. 24 kg / 52.91 lbs                                                           |

### Order No.

#### 230 V

**94-63-103B** (for dia. 3 mm)  
**94-63-104B** (for dia. 4 mm)  
**94-63-105B** (for dia. 5 mm)  
**94-63-106B** (for dia. 6 mm)  
**94-63-171B** (for dia. 7,1 mm)  
**94-63-108B** (for dia. 8 mm)  
**94-63-153B** (for fir tree stud dia. 5)  
**94-63-163B** (for fir tree stud dia. 6)

#### 115 V

**94-66-103B** (for dia. 3 mm)  
**94-66-104B** (for dia. 4 mm)  
**94-66-105B** (for dia. 5 mm)  
**94-66-106B** (for dia. 6 mm)  
**94-66-171B** (for dia. 7,1 mm)  
**94-66-108B** (for dia. 8 mm)  
**94-66-153B** (for fir tree stud dia. 5)  
**94-66-163B** (for fir tree stud dia. 6)

#### Change over kit (for 230 V and 115 V)

**94-43-203B** (dia. 3)  
**94-43-204B** (dia. 4)  
**94-43-205B** (dia. 5)  
**94-43-206B** (dia. 6)  
**94-43-271B** (dia. 7,1)  
**94-43-208B** (dia. 8)  
**94-43-253B** (dia. 5 fir tree stud)  
**94-43-263B** (dia. 6 fir tree stud)



## PAH-1



|                            |                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                  |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Suitable stud welding unit | CDi 1502 AT, CDMi 2402, CDMi 3202, ARC 800, IT 1002, IT 90                                                                                                                                                                                                                                                                                  | CDi 1502 AT, CDMi 2402, CDMi 3202, ARC 800, IT 1002, IT 90                                                                                                                                                                                                                                                                                       |
| Welding process            | CD, SC                                                                                                                                                                                                                                                                                                                                      | CD, SC                                                                                                                                                                                                                                                                                                                                           |
| Stud material              |     |     |
| Welding range              | M3 to M8, dia. 3 to 8 mm / #4 to 5/16", dia. #4 to 5/16"                                                                                                                                                                                                                                                                                    | M3 to M8, dia. 3 to 8 mm / #4 to 5/16", dia. #4 to 5/16"                                                                                                                                                                                                                                                                                         |
| Stud length                | 8 to 30 mm / 0.31" to 1.18"                                                                                                                                                                                                                                                                                                                 | 8 to 30 mm / 0.31" to 1.18"                                                                                                                                                                                                                                                                                                                      |
| Stud type                  | Welding elements with flange according to current standards (other studs on request)                                                                                                                                                                                                                                                        | Welding elements with flange according to current standards (other studs on request)                                                                                                                                                                                                                                                             |
| Lift                       | Adjustment range 5 mm / 0.20"                                                                                                                                                                                                                                                                                                               | Adjustment range 5 mm / 0.20"                                                                                                                                                                                                                                                                                                                    |
| Welding cable              | 3 m / 9.84'                                                                                                                                                                                                                                                                                                                                 | 3 m / 9.84'                                                                                                                                                                                                                                                                                                                                      |
| IP Code                    | IP 20                                                                                                                                                                                                                                                                                                                                       | IP 20                                                                                                                                                                                                                                                                                                                                            |
| Workplace noise level      | > 90 dB (A) may occur during welding                                                                                                                                                                                                                                                                                                        | > 90 dB (A) may occur during welding                                                                                                                                                                                                                                                                                                             |
| Dimension LxWxH            | 295 x 60 x 170 mm / 11.61" x 2.36" x 6.70" (without cable)                                                                                                                                                                                                                                                                                  | 295 x 60 x 170 mm / 11.61" x 2.36" x 6.70" (without cable)                                                                                                                                                                                                                                                                                       |
| Weight                     | 1.4 kg / 3.09 lbs (without cable)                                                                                                                                                                                                                                                                                                           | 1.4 kg / 3.09 lbs (without cable)                                                                                                                                                                                                                                                                                                                |



### Order No.

**94-20-025** (Tripod)  
Equipped for one standard stud dimension according to customer request (possible equipment see accessories catalogue)

#### Sets

**CDi1504PAH+** (CDi 1502 AT, PAH-1, ground cable)  
**CDMi242AT+** (CDMi 2402, PAH-1, ground cable)  
**ARC8001AT+** (ARC 800, PAH-1, ground cable)

#### Assortment box

(Pin stop, guide bushing, mounting tool, feed tube, socket wrench, plunger, pin)

**84-40-013A** (dia. 3 to 8 mm, length 6 to 30 mm, for manual stud feeding by hand)

**84-43-013A** (dia. 3 to 8 mm, length 6 to 30 mm, for automatic stud feeding by VBZ-3)

#### Quick-Boy

**92-40-140** for PAH-1

### Order No.

**94-20-028** (Centering device dia. 30 mm)  
Equipped for one standard stud dimension according to customer request (possible equipment see accessories catalogue)

#### Assortment box

(Pin stop, guide bushing, mounting tool, feed tube, socket wrench, plunger, pin)

**84-40-013A** (dia. 3 to 8 mm, length 6 to 30 mm, for manual stud feeding by hand)

**84-43-013A** (dia. 3 to 8 mm, length 6 to 30 mm, for automatic stud feeding by VBZ-3)

#### Quick-Boy

**92-40-140** for PAH-1

#### Legend

Welding process: CD = Capacitor discharge stud welding, SC = Short cycle stud welding

 Mild steel  Stainless steel  Aluminum  Brass

## KAH 412

## KAH 412 LA



- Setting the lift and plunge via digital display (selection mm/inch)
- No length compensation

- Setting the lift via adjustment screw (increments 0.1 mm)
- Length compensation of length variances in studs height and variances of the workpiece

M3 to M8 (10 to 12.7 mm)  
#4 to 5/16" (3/8" to 1/2")

M3 to M8 (10 to 12.7 mm)  
#4 to 5/16" (3/8" to 1/2")



|                                   |                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                              |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Welding process</b>            | CD - Contact welding (optional)<br>CD - Gap welding<br>SC, ARC (optional)                                                                                                                                                                                                                                                               | CD - Gap welding<br>SC, ARC (optional)                                                                                                                                                                                                                                                                                                       |
| <b>Stud material</b>              |     |     |
| <b>Welding range</b>              | M3 to M8, dia. 3 to 8 mm; #4 to 5/16", dia. #4 to 5/16"<br>(dia. 10 to 12.7 mm; dia. 3/8" to 1/2" with modification only)                                                                                                                                                                                                               | M3 to M8, dia. 3 to 8 mm; #4 to 5/16", dia. #4 to 5/16"<br>(dia. 10 to 12.7 mm; dia. 3/8" to 1/2" with modification only)                                                                                                                                                                                                                    |
| <b>Stud length</b>                | 8 to 40 mm / 0.31" to 1.57"<br>(other lengths on request)                                                                                                                                                                                                                                                                               | 8 to 40 mm / 0.31" to 1.57"<br>(other lengths on request)                                                                                                                                                                                                                                                                                    |
| <b>Stud type</b>                  | Welding elements with flange according to current standards (other studs on request)                                                                                                                                                                                                                                                    | Welding elements with flange according to current standards (other studs on request)                                                                                                                                                                                                                                                         |
| <b>Stroke/Length compensation</b> | --                                                                                                                                                                                                                                                                                                                                      | 5/2 mm, 4/3 mm / 0.2"/0.08", 0.16"/0.12"                                                                                                                                                                                                                                                                                                     |
| <b>Spring pressure</b>            | Arresting                                                                                                                                                                                                                                                                                                                               | Arresting                                                                                                                                                                                                                                                                                                                                    |
| <b>IP Code</b>                    | IP 20                                                                                                                                                                                                                                                                                                                                   | IP 20                                                                                                                                                                                                                                                                                                                                        |
| <b>Workplace noise level</b>      | > 90 dB (A) may occur during welding                                                                                                                                                                                                                                                                                                    | > 90 dB (A) may occur during welding                                                                                                                                                                                                                                                                                                         |
| <b>Dimension LxWxH</b>            | 375 x 66 x 145 mm, 14.76" x 2.60" x 5.71"<br>with chuck and quick change system                                                                                                                                                                                                                                                         | 375 x 66 x 145 mm, 14.76" x 2.60" x 5.71"<br>with chuck and quick change system                                                                                                                                                                                                                                                              |
| <b>Weight</b>                     | 3.4 kg / 7.50 lbs                                                                                                                                                                                                                                                                                                                       | 3.4 kg / 7.50 lbs                                                                                                                                                                                                                                                                                                                            |

### Order No.

#### 94-31-412C

Equipped for one standard stud dimension according to customer request (possible equipment see accessories catalogue page 98-105)

#### Assortment box

(Pin stop, guide bushing, mounting tool, feed tube, socket wrench, plunger, pin)

**84-41-312A** (dia. 3 to 8 mm, length 6 to 40 mm, for manual stud feeding by hand)

**84-42-312A** (dia. 3 to 8 mm, length 6 to 40 mm, for automatic stud feeding by VBZ-3)

### Order No.

#### 94-37-412 (with length compensation)

Equipped for one standard stud dimension according to customer request (possible equipment see accessories catalogue page 98-105)

#### Assortment box

(Pin stop, guide bushing, mounting tool, feed tube, socket wrench, plunger, pin)

**84-41-312A** (dia. 3 to 8 mm, length 6 to 40 mm, for manual stud feeding by hand)

**84-42-312A** (dia. 3 to 8 mm, length 6 to 40 mm, for automatic stud feeding by VBZ-3)



### Legend


Welding process: CD = Capacitor discharge stud welding, SC = Short cycle stud welding

 Mild steel  Stainless steel  Aluminium  Brass

### HBS precision welding head

#### KAH 412 and KAH 412 LA

(KAH 412 LA with length compensation:  
Application short cycle)

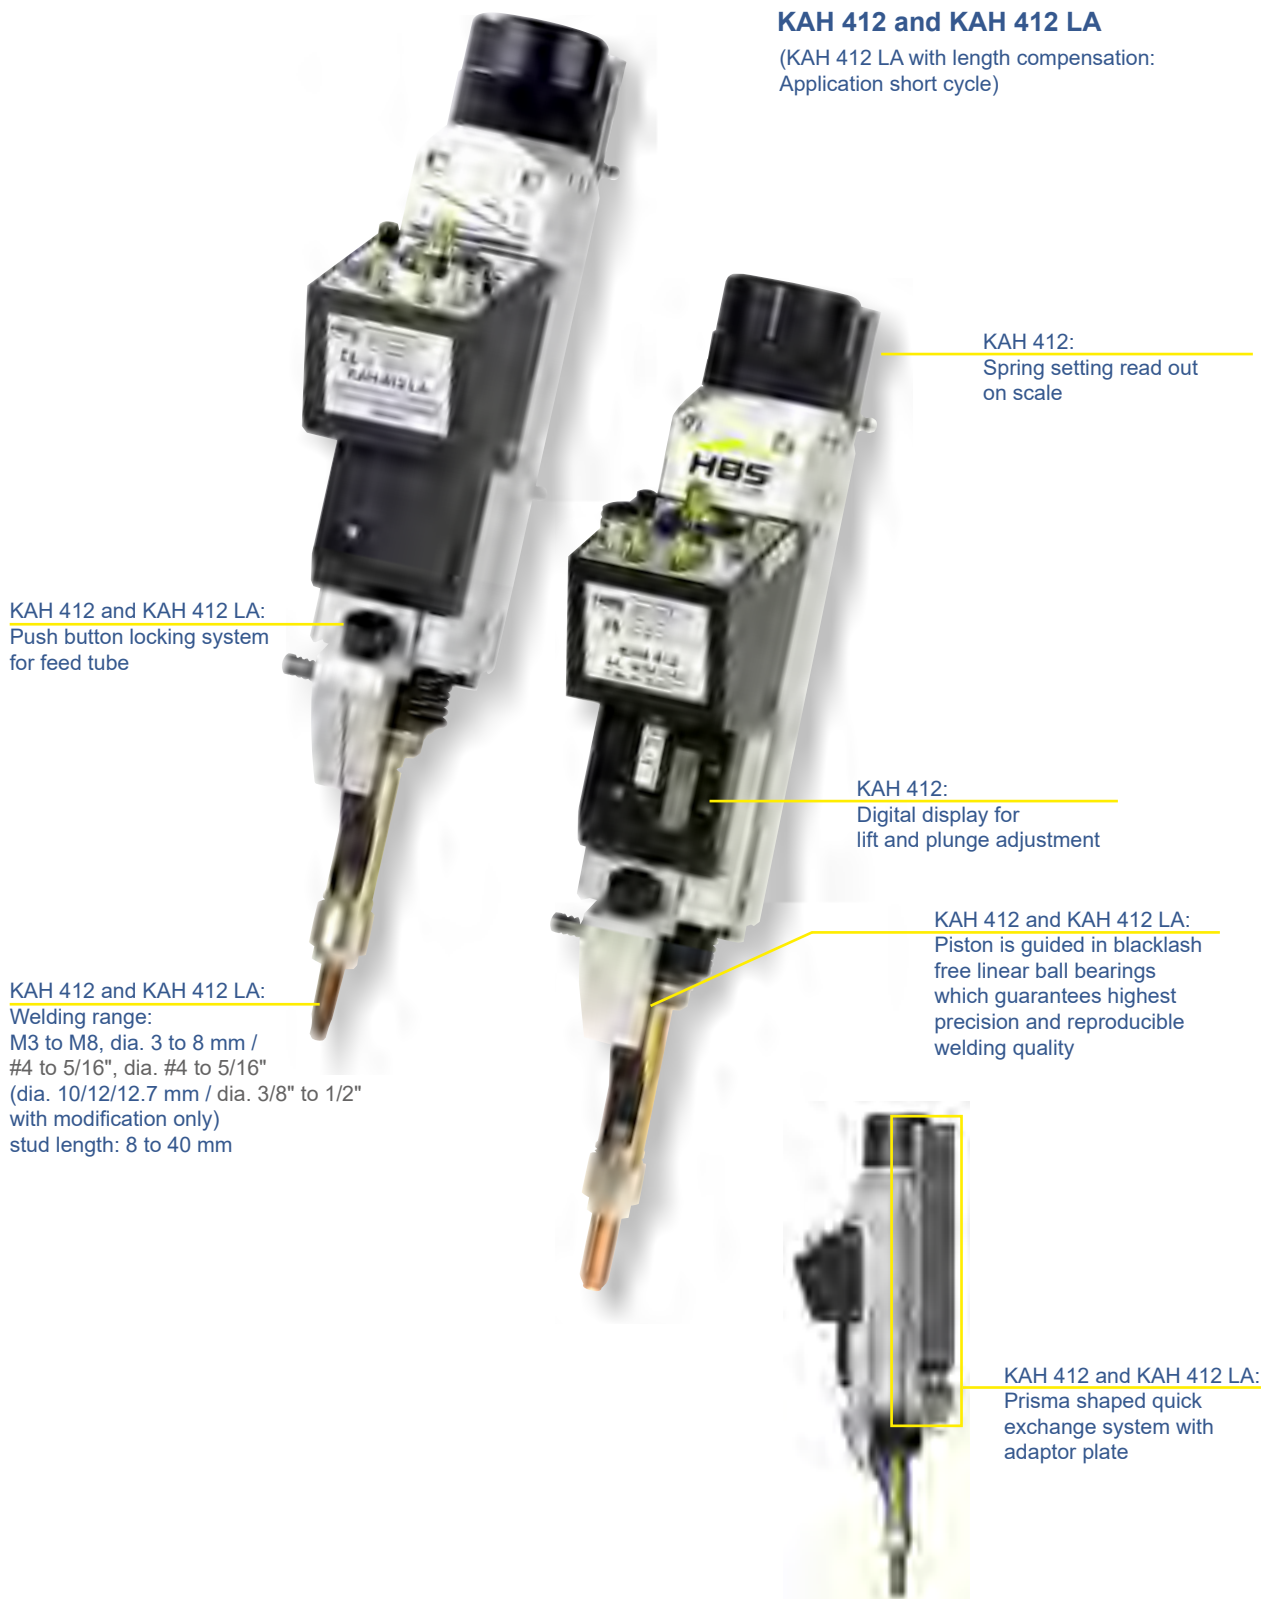

|                                                                                     | Stud welding machines                                                     | Welding process | Order No.                                  | Primary power      | Automatic | Charging units | Gas | Welding gun or head connection | Process control | Emergency stop function |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------|-----------------|--------------------------------------------|--------------------|-----------|----------------|-----|--------------------------------|-----------------|-------------------------|
|    | <b>CDi 1502 AT</b><br>M3 to M8<br>#4 to 5/16"                             | CD              | <b>92-10-1504B</b>                         | 230 V              | X         | 1              | --  | 1*)                            | --              | --                      |
|    | <b>CDMi 2402</b><br>M3 to M8 (M10 limited)<br>#4 to 5/16" (7/16" limited) | CD              | <b>92-10-22412B</b><br><b>92-12-22412B</b> | 230 V<br>115 V     | X         | 2              | --  | 1                              | X               | --                      |
|    | <b>CDMi 3202</b><br>M3 to M10<br>#4 to 7/16"                              | CD              | <b>92-10-23212B</b><br><b>92-12-23212B</b> | 230 V<br>115 V     | X         | 3              | --  | 1                              | X               | --                      |
|   | <b>ARC 800</b><br>Dia. 2 - 10 mm<br>14 ga - 3/8"                          | ARC SC          | <b>93-10-0704A</b>                         | 400 V              | X         | --             | X   | 1                              | --              | --                      |
|  | <b>IT 1002</b><br>Dia. 2 mm to M16 (Type RD)<br>14 ga - 5/8" (Type RD)    | ARC SC          | <b>93-60-1206</b><br><b>93-66-1206</b>     | 400 V<br>480/460 V | X         | --             | X   | 1                              | X               | --                      |
|                                                                                     |                                                                           |                 | <b>93-60-1208</b>                          | 400 V              | X         | --             | X   | 1                              | X               | X                       |
|  | <b>IT 90</b><br>Dia. 2 - 22 mm<br>14 ga - 7/8"                            | ARC SC          | <b>93-60-12096</b>                         | 400 V              | X         | --             | X   | 1                              | X               | --                      |
|                                                                                     |                                                                           |                 | <b>93-60-12097</b>                         | 400 V              | X         | --             | X   | 1                              | X               | X                       |
|                                                                                     |                                                                           |                 | <b>93-60-42096</b>                         | 400 V              | X         | --             | X   | 4                              | X               | --                      |
|                                                                                     |                                                                           |                 | <b>93-60-42097</b>                         | 400 V              | X         | --             | X   | 4                              | X               | X                       |

\*) only welding gun possible

## Welding unit sets

| <b>CDi 1502 AT with PAH-1</b>                                                       |  | <b>Order No.: CDi1504PAH+ includes:</b>    |  | <b>CDMi 2402 with PAH-1</b>                                                          |  | <b>Order No.: CDMi242AT+ includes:</b>    |  |
|-------------------------------------------------------------------------------------|--|--------------------------------------------|--|--------------------------------------------------------------------------------------|--|-------------------------------------------|--|
|  |  | CDi 1502 AT 230 V<br>Order No. 92-10-1504B |  |   |  | CDMi 2402 230 V<br>Order No. 92-10-22412B |  |
|  |  | PAH-1<br>Order No. 94-20-025               |  |   |  | PAH-1<br>Order No. 94-20-025              |  |
|  |  | Ground cable<br>Order No. 92-40-095        |  |  |  | Ground cable<br>Order No. 92-40-095       |  |

### CDi 1502 AT

### CDMi 2402

### CDMi 3202



- Entry level automation for semi-automatic use
- Simple library function for ease of use

- All-rounder for automation
- Extensive library function
- Change over of capacitors for optimal energy input

- Energy package for automation
- Extensive library function
- Change over of capacitors for optimal energy input

M3 to M8  
#4 to 5/16"

M3 to M8 (M10)  
#4 to 5/16" (7/16")

M3 to M10  
#4 to 7/16"

|                                         |                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                 |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Welding process</b>                  | CD                                                                                                                                                                                                                                                                                                                                      | CD                                                                                                                                                                                                                                                                                                                                      | CD                                                                                                                                                                                                                                                                                                                                              |
| <b>Welding material</b>                 |     |     |     |
| <b>Technology</b>                       | Inverter-Capacitor Charging Technology                                                                                                                                                                                                                                                                                                  | Inverter-Capacitor Charging Technology                                                                                                                                                                                                                                                                                                  | Inverter-Capacitor Charging Technology                                                                                                                                                                                                                                                                                                          |
| <b>Equipment Automation</b>             | X                                                                                                                                                                                                                                                                                                                                       | X                                                                                                                                                                                                                                                                                                                                       | X                                                                                                                                                                                                                                                                                                                                               |
| <b>Display</b>                          | Digital                                                                                                                                                                                                                                                                                                                                 | LCD                                                                                                                                                                                                                                                                                                                                     | LCD                                                                                                                                                                                                                                                                                                                                             |
| <b>Welding range</b>                    | Studs:<br>M3 to M8, dia. 2 to 8 mm<br>#4 to 5/16", dia. 14 ga to 5/16"                                                                                                                                                                                                                                                                  | M3 to M8 (M10 limited), dia. 2 to 8 mm (dia. 10 mm limited)<br>#4 to 5/16", (7/16" limited),<br>dia. 14 ga to 5/16" (dia. 3/8" limited)                                                                                                                                                                                                 | M3 to M10, dia. 2 to 10 mm<br>#4 to 7/16", dia. 14 ga to 3/8"                                                                                                                                                                                                                                                                                   |
| <b>Welding rate</b>                     | M3 / #4 = 40 studs/min (voltage 60 V)<br>M8 / 5/16" = 14 studs/min (voltage 200 V)<br>M8 / 5/16" = 12 studs/min (voltage 220 V)                                                                                                                                                                                                         | M3 / #4 = 40 studs/min (voltage 60 V)<br>M8 / 5/16" = 21 studs/min (voltage 170 V)<br>(M10 / 7/16" = 17 studs/min (voltage 210 V))                                                                                                                                                                                                      | M3 / #4 = 43 studs/min (voltage 50 V)<br>M8 / 5/16" = 25 studs/min (voltage 140 V)<br>M10 / 7/16" = 18 studs/min (voltage 200 V)                                                                                                                                                                                                                |
| <b>Capacitance</b>                      | 66 000 µF                                                                                                                                                                                                                                                                                                                               | 99 000 µF/33 000 µF*<br>* with change over of capacitors                                                                                                                                                                                                                                                                                | 132 000 µF/66 000 µF*<br>* with change over of capacitors                                                                                                                                                                                                                                                                                       |
| <b>Welding time</b>                     | 1 to 3 ms                                                                                                                                                                                                                                                                                                                               | 1 to 3 ms                                                                                                                                                                                                                                                                                                                               | 1 to 3 ms                                                                                                                                                                                                                                                                                                                                       |
| <b>Energy</b>                           | 1 600 Ws                                                                                                                                                                                                                                                                                                                                | 2 400 Ws/800 Ws*                                                                                                                                                                                                                                                                                                                        | 3 200 Ws/1 600 Ws*                                                                                                                                                                                                                                                                                                                              |
| <b>Charging voltage</b>                 | 50 to 220 V (stepless voltage regulation)                                                                                                                                                                                                                                                                                               | 50 to 220 V (stepless voltage regulation)                                                                                                                                                                                                                                                                                               | 50 to 220 V (stepless voltage regulation)                                                                                                                                                                                                                                                                                                       |
| <b>Primary power</b>                    | 230 V, 50/60 Hz, 10 AT (slow blow)                                                                                                                                                                                                                                                                                                      | 230 V**, 50/60 Hz, 10 AT (slow blow)<br>**alternative primary power see „Order No.“                                                                                                                                                                                                                                                     | 230 V**, 50/60 Hz, 10 AT (slow blow)<br>**alternative primary power see „Order No.“                                                                                                                                                                                                                                                             |
| <b>Connected load</b>                   | 600 VA                                                                                                                                                                                                                                                                                                                                  | 1 000 VA                                                                                                                                                                                                                                                                                                                                | 1 800 VA                                                                                                                                                                                                                                                                                                                                        |
| <b>Power source</b>                     | Capacitor                                                                                                                                                                                                                                                                                                                               | Capacitor                                                                                                                                                                                                                                                                                                                               | Capacitor                                                                                                                                                                                                                                                                                                                                       |
| <b>Cooling type</b>                     | F (temperature controlled cooling fan)                                                                                                                                                                                                                                                                                                  | F (temperature controlled cooling fan)                                                                                                                                                                                                                                                                                                  | F (temperature controlled cooling fan)                                                                                                                                                                                                                                                                                                          |
| <b>IP Code</b>                          | IP 21                                                                                                                                                                                                                                                                                                                                   | IP 21                                                                                                                                                                                                                                                                                                                                   | IP 21                                                                                                                                                                                                                                                                                                                                           |
| <b>Dimension LxWxH (without handle)</b> | 400 x 205 x 250 mm / 15.75" x 8.07" x 9.84"                                                                                                                                                                                                                                                                                             | 570 x 285 x 290 mm / 22.44" x 11.22" x 11.42"                                                                                                                                                                                                                                                                                           | 570 x 285 x 290 mm / 22.44" x 11.22" x 11.42"                                                                                                                                                                                                                                                                                                   |
| <b>Weight</b>                           | 14 kg / 30.87 lbs                                                                                                                                                                                                                                                                                                                       | 26 kg / 57.32 lbs                                                                                                                                                                                                                                                                                                                       | 27 kg / 59.53 lbs                                                                                                                                                                                                                                                                                                                               |
| <b>Suitable guns/heads</b>              | PAH-1                                                                                                                                                                                                                                                                                                                                   | PAH-1, KAH 412, KAH 412 LA                                                                                                                                                                                                                                                                                                              | PAH-1, KAH 412, KAH 412 LA                                                                                                                                                                                                                                                                                                                      |

Order No.

92-10-1504B (230 V)

Order No.

92-10-22412B (230 V)  
92-12-22412B (115 V)

Order No.

92-10-23212B (230 V)  
92-12-23212B (115 V)

Legend

Welding process: CD = Capacitor discharge stud welding

 Mild steel  Stainless steel  Aluminium  Brass




## ARC 800



- Robust transformer with automatic function

M3 to M12 (type RD)  
#4 to 1/2" (type RD)



(Ceramic ferrule only for manual application)

|                                  |                                                                                                                                                                     |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Welding process                  | ARC, SC                                                                                                                                                             |
| Welding material                 |   |
| Technology                       | Transformer                                                                                                                                                         |
| Equipment                        |                                                                                                                                                                     |
| Welding with ceramic ferrule     | X                                                                                                                                                                   |
| Welding with shielding gas       | X                                                                                                                                                                   |
| Automation                       | X                                                                                                                                                                   |
| Display                          | Digital                                                                                                                                                             |
| Welding range                    | M3 to M12 (type RD), dia. 2 to 10 mm /<br>#4 to 1/2" (type RD), dia. 14 ga to 3/8"                                                                                  |
| Welding rate                     | 7 to 17 studs/min (depending on application and stud dia.)                                                                                                          |
| Welding rate                     | 800 A                                                                                                                                                               |
| Current adjustment range         | --                                                                                                                                                                  |
| Welding time                     | 5 to 1000 ms (stepless)                                                                                                                                             |
| Primary power                    | 400 V, 3 phases, 50/60 Hz, 35 AT (slow blow)                                                                                                                        |
| Primary plug                     | 32 A (at 400 V mains)                                                                                                                                               |
| Connected load                   | $I_{max} = 31 A$                                                                                                                                                    |
| Cooling type                     | F (temperature controlled cooling fan)                                                                                                                              |
| IP Code                          | IP 23                                                                                                                                                               |
| Dimension LxWxH (without handle) | 470 x 230 x 220 mm / 18.50" x 9.06" x 8.66"                                                                                                                         |
| Weight                           | 40 kg / 88.185 lbs                                                                                                                                                  |
| Suitable guns/heads              | PAH-1, KAH 412, KAH 412 LA                                                                                                                                          |

Order No.

93-10-0704A (400 V)

Legend

Welding process: ARC = Drawn arc stud welding, SC = Short cycle stud welding



Mild steel



Stainless steel

|                                  |                                                                                                                                                        |  |                                                                                                                                                                   |  |
|----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| <br><br>                         | <b>IT 1002</b>                                                                                                                                         |  | <b>IT 90</b>                                                                                                                                                      |  |
|                                  |                                                                                                                                                        |  |                                                                                                                                                                   |  |
|                                  | <ul style="list-style-type: none"> <li>• All-rounder for automation</li> <li>• Precise welding results through advanced inverter technology</li> </ul> |  | <ul style="list-style-type: none"> <li>• 4 outputs (optional), process monitoring and shielding gas</li> <li>• For critical surfaces (e.g. galvanised)</li> </ul> |  |
|                                  | M3 to M16 (type RD)<br>#4 to 5/8" (type RD)                                                                                                            |  | M3 to M24<br>#4 to 1"                                                                                                                                             |  |
|                                  | (Ceramic ferrule only for manual application)                                                                                                          |  | (Ceramic ferrule only for manual application)                                                                                                                     |  |
| Welding process                  | ARC, SC                                                                                                                                                |  | ARC, SC                                                                                                                                                           |  |
| Welding material                 |                                                                                                                                                        |  |                                                                                                                                                                   |  |
| Technology                       | Inverter                                                                                                                                               |  | Inverter                                                                                                                                                          |  |
| Equipment                        |                                                                                                                                                        |  |                                                                                                                                                                   |  |
| Welding with ceramic ferrule     | X                                                                                                                                                      |  | X                                                                                                                                                                 |  |
| Welding with shielding gas       | X                                                                                                                                                      |  | X                                                                                                                                                                 |  |
| Process control                  | X                                                                                                                                                      |  | X                                                                                                                                                                 |  |
| Automation                       | X                                                                                                                                                      |  | X                                                                                                                                                                 |  |
| 4 gun/head connections           | --                                                                                                                                                     |  | (optional)                                                                                                                                                        |  |
| Display                          | Digital                                                                                                                                                |  | Digital                                                                                                                                                           |  |
| Welding range                    | M3 to M16 (type RD), dia. 2 to 14 mm<br>#4 to 5/8" (type RD), dia. 14 ga to 9/16"                                                                      |  | M3 to M24, dia. 2 to 22 mm /<br>#4 to 1", dia. 14 ga to 7/8"                                                                                                      |  |
| Welding rate                     | M12 / 1/2" = 25 studs/min                                                                                                                              |  | Dia. 22 / 7/8" = 6 studs/min                                                                                                                                      |  |
| Welding current                  | 1000 A (max.)                                                                                                                                          |  | 2000 A (max.)                                                                                                                                                     |  |
| Current adjustment range         | 100 to 1000 A,<br>electrode 50 to 400 A (stepless)                                                                                                     |  | 300 to 2000 A (stepless)                                                                                                                                          |  |
| Welding time                     | 5 to 1000 ms (stepless)                                                                                                                                |  | 5 to 1500 ms (stepless)                                                                                                                                           |  |
| Primary power                    | 400 V*, 3 phases, 50/60 Hz, 35 AT (slow blow)<br>*alternative primary power see „Order No.“                                                            |  | 400 V, 3 phases, 50/60 Hz, 63 AT (slow blow)                                                                                                                      |  |
| Primary plug                     | 32 A (with 400 V mains)                                                                                                                                |  | 63 A (with 400 V mains)                                                                                                                                           |  |
| Connected load                   | 50 kVA (with 400 V mains)                                                                                                                              |  | 100 kVA (with 400 V mains)                                                                                                                                        |  |
| Cooling type                     | F (temperature controlled cooling fan)                                                                                                                 |  | F (temperature controlled cooling fan)                                                                                                                            |  |
| IP Code                          | IP 23                                                                                                                                                  |  | IP 21                                                                                                                                                             |  |
| Dimension LxWxH (without handle) | 660 x 280 x 340 mm / 26" x 11" x 13.4"                                                                                                                 |  | 650 x 560 x 1290 mm / 25.6" x 22" x 50.8"                                                                                                                         |  |
| Weight                           | 31 kg / 68.343 lbs                                                                                                                                     |  | 145 kg / 319.67 lbs (1 gun conn.)<br>165 kg / 363.76 lbs (4 gun conn.)                                                                                            |  |
| Suitable guns/heads              | PAH-1, KAH 412, KAH 412 LA                                                                                                                             |  | PAH-1, KAH 412, KAH 412 LA                                                                                                                                        |  |
|                                  | Order No.                                                                                                                                              |  | Order No.                                                                                                                                                         |  |
|                                  | 93-60-1206 (400 V – process control)                                                                                                                   |  | 93-60-12096 (400 V – 1 gun connection)                                                                                                                            |  |
|                                  | 93-66-1206 (480/460 V – process control)                                                                                                               |  | 93-60-42096 (400 V – 4 gun connection)                                                                                                                            |  |

Legend

Welding process: ARC = Drawn arc stud welding, SC = Short cycle stud welding

Mild steel Stainless steel Aluminium

## IPC 90



- System integrators for integration into production lines
- Stud welding process self-sufficiently controlled by HBS components
- Parameter monitoring for optimal welding results
- For control of up to 5 welding heads

M3 to M8  
#4 to 5/16"

|                                   |                                                                                                                                                                                                                                                       |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Welding process                   | SC, PARC                                                                                                                                                                                                                                              |
| Welding material                  |    |
| Welding range                     | M3 to M8, dia. 3 to 8 mm<br>#4 to 5/16", dia. #4 to 5/16"                                                                                                                                                                                             |
| Stud length                       | 8 to 40 mm / 0.31" - 1.57"                                                                                                                                                                                                                            |
| Welding capacity                  | Up to 20 studs/min                                                                                                                                                                                                                                    |
| Welding current / Short Cycle     | 300 to 2000 A (stepless)                                                                                                                                                                                                                              |
| Welding time / Short Cycle        | 5 to 1000 ms (stepless)                                                                                                                                                                                                                               |
| Welding current / PARC            | 50 to 2000 A (stepless)                                                                                                                                                                                                                               |
| Welding time / PARC               | 5 - 150 ms (stepless)                                                                                                                                                                                                                                 |
| Stud feeding                      | Automatic stud feeding                                                                                                                                                                                                                                |
| Display                           | Coloured                                                                                                                                                                                                                                              |
| Pneumatic working stroke          | Max. Z = 120 mm<br>Max. Z = 4.92"                                                                                                                                                                                                                     |
| Welding head                      | <b>KAH 612</b>                                                                                                                                                                                                                                        |
| Max. number of stud welding heads | 5                                                                                                                                                                                                                                                     |
| Connections                       | Electrical: 400 V, 3 phases, 50/60 Hz; 35 AT (32 AT),<br>Pneumatic: 6 bar                                                                                                                                                                             |
| Cooling type                      | F (temperature controlled cooling fan)                                                                                                                                                                                                                |
| Primary plug                      | 32 A                                                                                                                                                                                                                                                  |
| IP Code                           | IP 21                                                                                                                                                                                                                                                 |
| Dimension LxWxH                   | Approx. 950 x 780 x 1150 mm<br>Approx. 37.40" x 30.71" x 45.28"                                                                                                                                                                                       |
| Weight                            | Approx. 220 kg / 485 lbs                                                                                                                                                                                                                              |

Order No.

According to project



KAH 612

Legend      Welding process: SC = Short cycle stud welding, PARC = Welding with adjustable welding curve

 Mild steel    Stainless steel    Aluminium

## CPW Series

5



- Entry-level CNC stud welding machine with one welding head
- High speed with highest positioning accuracy by robust machine base frame
- Working with different work piece heights on a working range of 600 x 420 x 120 mm

M3 to M8 (dia. 10/12/12,7 mm only possible with modification)  
#4 to 5/16" (dia. 3/8" to 1/2" only possible with modification)



|                                            |                                                                                                                                                                    |
|--------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Working range</b>                       | 600 x 420 x 120 mm / 23.6" x 16.5" x 4.7"                                                                                                                          |
| <b>T-slot work plate</b>                   | 800 x 490 mm / 31.5" x 19.3"                                                                                                                                       |
| <b>Welding range</b>                       | M3 to M8, dia. 3 to 8 mm (dia. 10/12/12,7 mm only possible with modification)<br>#4 to 5/16", dia. #4 to 5/16" (dia. 3/8" to 1/2" only possible with modification) |
| <b>Stud length</b>                         | 8 to 40 mm / 0.31" to 1.57" (other lengths on request)                                                                                                             |
| <b>Welding capacity</b>                    | Up to 30 studs/min (depending on configuration)                                                                                                                    |
| <b>Traverse speed</b>                      | 25 m/min (X-Y), 20 m/min (Z) / 82"/min X-Y, 65,6"/min Z                                                                                                            |
| <b>Stud feeding</b>                        | Automatic stud feeding (up to 3 different stud length per welding head)                                                                                            |
| <b>Positioning accuracy of welded stud</b> | ± 0,2 mm / ± 0,008"                                                                                                                                                |
| <b>Positioning and repeat accuracy</b>     | ± 0,05 mm / ± 0,002"                                                                                                                                               |
| <b>Stud welding head</b>                   | KAH 412<br>KAH 412 LA (mechanical length compensation - gap)                                                                                                       |
| <b>Max. number of stud welding heads</b>   | 1                                                                                                                                                                  |
| <b>Connections</b>                         | Electrical: 400 V, 16 A, 50 Hz; Pneumatic: 6 bar min./ 10 bar max./ inner hose dia. 6 mm                                                                           |
| <b>Motor-driven Z-axis</b>                 | Z = 0 to 120 mm / 0 to 4.7" (free programmable because of servo drive technology)                                                                                  |
| <b>Controller</b>                          | High performance PLC IEC 61131-3                                                                                                                                   |
| <b>Display</b>                             | 9" Touchscreen                                                                                                                                                     |
| <b>Keyboard</b>                            | Touch                                                                                                                                                              |
| <b>Dimension LxWxH</b>                     | 1600 x 950 x 1900 mm / 63" x 37.4" x 74.8"                                                                                                                         |
| <b>Weight</b>                              | Approx. 640 kg / 1410,96 lbs                                                                                                                                       |

Order No.

According to project



## MPW Series



- High performance CNC stud welding machine (with up to 4 welding heads)
- Highest speed possible with high positioning accuracy through rugged design
- Very short set-up time (a.e. automatic calibration of Z-axes)
- Network connection

M3 to M8 (dia. 10/12/12.7 mm only possible with modification)  
#4 to 5/16" (dia. 3/8" to 1/2" only possible with modification)



|                                            |                                                                                                                                                                    |
|--------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Working range</b>                       | 1250 x 1050 mm / 49.21" x 41.34" (MPW 1010);<br>1250 x 2250 mm / 49.21" x 88.58" (MPW 2010);<br>(maximum working range for up to 3 welding heads)                  |
| <b>Welding range</b>                       | M3 to M8, dia. 3 to 8 mm (dia. 10/12/12.7 mm only possible with modification)<br>#4 to 5/16", dia. #4 to 5/16" (dia. 3/8" to 1/2" only possible with modification) |
| <b>Stud length</b>                         | 8 to 40 mm / 0.31" to 1.57" (other lengths on request)                                                                                                             |
| <b>Welding capacity</b>                    | Up to 30 studs/min (depending on configuration)                                                                                                                    |
| <b>Traverse speed</b>                      | Up to 48 m/min / 157.48"/min                                                                                                                                       |
| <b>Stud feeding</b>                        | Automatic stud feeding (up to 3 different stud lengths per welding head)                                                                                           |
| <b>Positioning accuracy of welded stud</b> | ± 0,2 mm / ± 0,008" (depending on work piece and stud geometry)                                                                                                    |
| <b>Positioning and repeat accuracy</b>     | ± 0,05 mm / ± 0,002"                                                                                                                                               |
| <b>Stud welding head</b>                   | KAH 412<br>KAH 412 LA (mechanical length compensation - gap)                                                                                                       |
| <b>Max. number of stud welding heads</b>   | 4 (up to 3 stud lengths per welding head possible)                                                                                                                 |
| <b>Connections</b>                         | Electrical: 400 V, 32 A, 50 Hz<br>Pneumatic: 6 bar min. / 10 bar max. / inner hose dia. 6 mm / 1/4"                                                                |
| <b>Motor-driven Z-axis</b>                 | Z = 0 to 200 mm / 0 to 7.87" (free programmable because of servo drive technology)                                                                                 |
| <b>Dimension LxWxH</b>                     | 2400 x 2700 x 3100 mm / 94.49" x 106.30" x 122.05" (MPW 1010);<br>3600 x 2700 x 3100 mm / 141.73" x 106.30" x 122.05" (MPW 2010)                                   |


**Order No.**

According to project



## MPW Accessories

### Code Reader

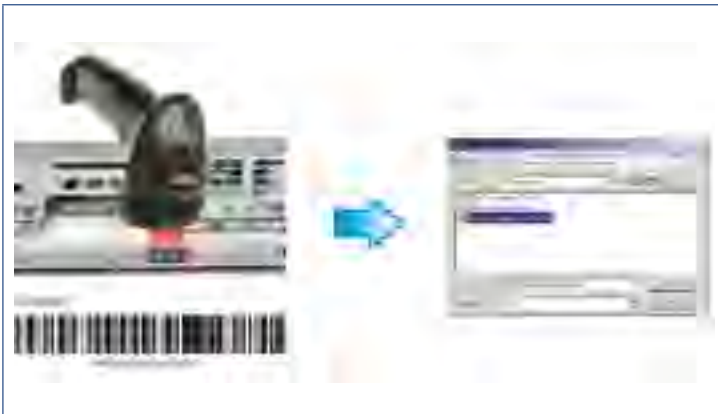

**Calling up welding programs made easy**

#### Customer benefits

##### *Time-savings*

The code reader reduces your search and startup times for welding programs.

##### *Error prevention*

The code reader ensures the clear-cut assignment of your welding programs to the workpieces.

Order No. 88-21-127

### Adjustment set for welding head



**Ensuring the accuracy of the stud welding machine**

#### Customer benefits


*Independent testing* and, if necessary, realignment of the position of the welding heads of the MPW series after changing welding heads.

*Ensure the accuracy* of the stud welding machine through periodic inspection of the welding head position.

*Detection of hidden flaws* or damage with regard to the welding head position.

Order No. 88-22-301B

### CAD Software

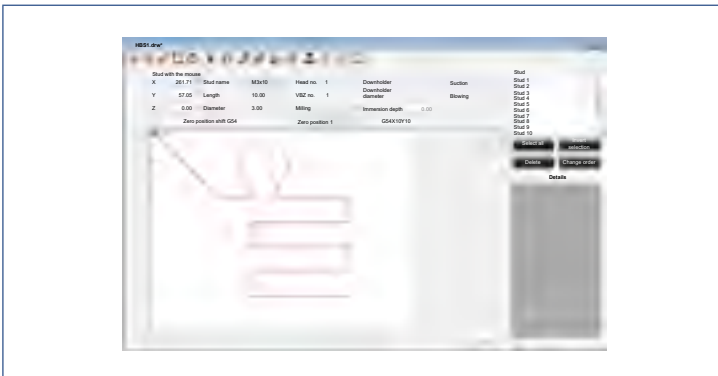

**HBS CAD converts a DXF-file into a CNC program**

#### Customer benefits

Enables external programming by using a DXF file.

Time saving.

Error prevention.

Order No. 80-50-0660



|                             |                                                                |
|-----------------------------|----------------------------------------------------------------|
| Pneum. single feed unit PBZ | for: KAH 412<br>for: installation in systems of the MPW series |
| M3                          | 94-43-133                                                      |
| M4                          | 94-43-134                                                      |
| M5                          | 94-43-135                                                      |
| M6                          | 94-43-136                                                      |
| M8                          | 94-43-138                                                      |



|                             |                                                                                                |
|-----------------------------|------------------------------------------------------------------------------------------------|
| Pneum. single feed unit PBZ | for: KAH 412<br>for: installation in systems of the CPW series (Basic kit 88-20-206 necessary) |
| M3                          | 88-18-163                                                                                      |
| M4                          | 88-18-164                                                                                      |
| M5                          | 88-18-165                                                                                      |
| M6                          | 88-18-166                                                                                      |
| M8                          | 88-18-168                                                                                      |



|                             |                                                                                 |
|-----------------------------|---------------------------------------------------------------------------------|
| Pneum. single feed unit PBZ | for: KAH 412<br>for: installation in automatic systems and systems of type PC-S |
| M3                          | 94-43-033                                                                       |
| M4                          | 94-43-034                                                                       |
| M5                          | 94-43-035                                                                       |
| M6                          | 94-43-036                                                                       |
| M8                          | 94-43-038                                                                       |



|                                            |                                                                                                                                           |
|--------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| Pneumatic stud feeding switch PBW complete | for: Feeding studs with the same diameter but different lengths into one automatic welding head<br>for: installation in automatic systems |
| M3                                         | 80-08-0471B                                                                                                                               |
| M4                                         | 80-08-0472B                                                                                                                               |
| M5                                         | 80-08-0473B                                                                                                                               |
| M6                                         | 80-08-0474B                                                                                                                               |
| M8                                         | 80-08-0475B                                                                                                                               |



|                           |                                                                                                                                                                    |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PMB-S (vertical movement) | Pneumatic ground clamp including clamp, swivelling, single acting<br>for: installation in systems of the MPW series, in automatic systems and systems of type PC-S |
|                           | 90-60-011                                                                                                                                                          |





|                           |                                                                                                                                         |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| PMB-S (vertical movement) | Pneumatic ground clamp including clamp, swivelling, single acting incl. sliding block<br>for: installation in systems of the CPW series |
|                           | 90-61-011                                                                                                                               |









|                                            |                                                                                                                                                                                                         |
|--------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PMB-LS2 (horizontal and vertical movement) | Pneumatic ground clamp including clamp (double clamp = extra charge), linear swivelling, double acting<br>for: installation in systems of the MPW series, in automatic systems and systems of type PC-S |
|                                            | 90-60-120                                                                                                                                                                                               |



|                                            |                                                                                                                                                                              |
|--------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PMB-LS2 (horizontal and vertical movement) | Pneumatic ground clamp including clamp (double clamp = extra charge), linear swivelling, double acting incl. sliding block<br>for: installation in systems of the CPW series |
|                                            | 90-61-120                                                                                                                                                                    |

|                                                                                     |                          |                                                                                                   |
|-------------------------------------------------------------------------------------|--------------------------|---------------------------------------------------------------------------------------------------|
|    | Welding current sensor   | for: Signal output - welding current was active<br>incl. connection cable (5 m)                   |
|                                                                                     |                          | 90-70-020                                                                                         |
|    | Solenoid valve           | for: switching the compressed air for manual stud feeding or for closing/opening the ground clamp |
|                                                                                     |                          | 80-10-188                                                                                         |
|    | Utensil socket           | for: Solenoid valve 80-10-188                                                                     |
|                                                                                     |                          | 80-10-189                                                                                         |
|    | Ring initiator           | to: See if stud has been fed                                                                      |
|                                                                                     | hole-Ø                   |                                                                                                   |
|                                                                                     | 10 mm                    | 80-50-0083                                                                                        |
|                                                                                     | 20 mm                    | 80-50-491                                                                                         |
|  | Coupling ring initiators | for: Connection between ring initiator and CNC control                                            |
|                                                                                     |                          | 80-10-375                                                                                         |
|  | ESS External weld start  | for: HBS stud welding units with 7-pin-plug                                                       |
|                                                                                     |                          | 90-70-016                                                                                         |

|                                                                                     |                                                                                    |                                                                                                                                                            |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | Connecting line complete for welding head KAH 412 continuously                     | for: CDMi 2402, CDMi 3202, ARC 800, IT 1002                                                                                                                |
|                                                                                     | 3 m, 25 mm²                                                                        | 92-40-131                                                                                                                                                  |
|                                                                                     | 5 m, 35 mm²                                                                        | 92-40-130                                                                                                                                                  |
|    | Working stroke complete, with height adjustment (125/45 mm) without ring initiator | for: KAH 412                                                                                                                                               |
|                                                                                     |                                                                                    | 80-09-760                                                                                                                                                  |
|    | Working stroke complete, with height adjustment (125/45 mm) with ring initiator    | for: KAH 412                                                                                                                                               |
|                                                                                     |                                                                                    | 80-09-750                                                                                                                                                  |
|  | Device for pneumatic fixture workpiece                                             | for: KAH 412 to hold down the workpiece                                                                                                                    |
|                                                                                     | Stroke 100 mm                                                                      | 80-08-702                                                                                                                                                  |
|  | Adjustment set for welding head position                                           | for: KAH 412 for setting the welding head after a welding head change or as a quality measure to ensure the accuracy of the stud welding machines type MPW |
|                                                                                     |                                                                                    | 88-22-301B                                                                                                                                                 |
|  | Code Reader                                                                        | incl. software package for: for calling up welding programs via barcode in the control system of stud welding machines type MPW                            |
|                                                                                     |                                                                                    | 88-21-127                                                                                                                                                  |
|  | CAD-Software                                                                       | for: MPW series creating welding programs for MPW control                                                                                                  |
|                                                                                     |                                                                                    | 80-50-0660                                                                                                                                                 |
|  | RDS Software                                                                       | for: MPW series for: Error analysis in the MPW control                                                                                                     |
|                                                                                     |                                                                                    | 80-50-2011                                                                                                                                                 |

| Welding technique                                                  | Type of stud <sup>1)</sup>                         | Symbol for stud                                                                             | Symbol for ceramic ferrule                                                                    |
|--------------------------------------------------------------------|----------------------------------------------------|---------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| Stud welding with tip ignition - CD                                | Threaded stud (pitch) <sup>2)</sup>                |  PT        | —                                                                                             |
|                                                                    | Unthreaded stud (pin) <sup>2)</sup>                |  UT        | —                                                                                             |
|                                                                    | Stud with internal thread <sup>2)</sup>            |  IT        | —                                                                                             |
|                                                                    | Ground clip single style                           |  F1        | —                                                                                             |
|                                                                    | Ground clip double style                           |  F2        | —                                                                                             |
| Drawn arc stud welding with ceramic ferrule or shielding gas - ARC | Threaded stud with reduced shaft <sup>2)</sup>     |  RD       |  RF       |
|                                                                    | Virtually fully-threaded stud                      |  MD (DD) |  MF (UF) |
|                                                                    | Partially threaded stud (pitch) <sup>2)</sup>      |  PD      |  PF      |
|                                                                    | Unthreaded stud (pin) <sup>2)</sup>                |  UD      |  UF      |
|                                                                    | Stud with internal thread <sup>2)</sup>            |  ID      |  UF      |
|                                                                    | Shear connector <sup>2)</sup>                      |  SD      |  UF/DF   |
| Short cycle drawn arc stud welding - SC                            | Threaded stud (pitch) with flange <sup>2)</sup>    |  PS      | —                                                                                             |
|                                                                    | Unthreaded stud (pin) with flange <sup>2)</sup>    |  US      | —                                                                                             |
|                                                                    | Stud with internal thread and flange <sup>2)</sup> |  IS      | —                                                                                             |

<sup>1)</sup> Further types of stud and ceramic ferrules can be specified as required for special applications.

<sup>2)</sup> according to standard DIN EN ISO 13918

## HBS – The Best Solutions

Our products are made and based on over 40 years of development experience and know how in stud welding technology. HBS welding elements encompass this technology. Use of HBS welding elements guarantees a continuous high quality weld.

The five major welding processes of capacitor discharge, drawn arc, short cycle, insulation and MARC have been designed to cover a wide range of applications. They are most commonly utilised for: vehicle construction, automotive supply industry, steel construction, mechanical engineering, electrical engineering, apparatus /

casing construction, control panel, cabinet construction, commercial kitchens, laboratory and health techniques, food industry, household appliances, information technology, metal fittings, curtain walling, steel construction, ventilation construction, insulating techniques, fire-proof insulation of power and combustion plants, vessel construction, shipbuilding etc.

With HBS stud and equipment products and technology, major benefits are realised from finding every thing from one source.

As a complete system provider you have one supplier, cost effective, fast delivery along with sustained high quality. This also applies to a variation in studs e.g. threaded studs, pins, studs with internal threads, ground clips, pads.

Additionally we supply customised welding elements and offer different accessories. Therefore we have a separate welding elements and accessories catalogue.





# FEEL THE STEEL

@hbswelding.systems